

TRANSFLUID

# TRANSFLUID

**industrial transmissions**



**KRAFT**  
*The power of performance.*

**drive with us**

FLUID COUPLINGS

| CONTENTS                             | PAGE     |
|--------------------------------------|----------|
| DESCRIPTION AND OPERATING CONDITIONS | 2        |
| FITTED ON ELECTRIC MOTORS            | 3        |
| DELAYED FILL CHAMBER ADVANTAGES      | 4        |
| STARTING TORQUE CHARACTERISTICS      | 5        |
| STANDARD MODELS                      | 6        |
| SELECTION                            | 7 to 8   |
| DIMENSIONS                           | 9 to 23  |
| OIL FILL                             | 24       |
| SAFETY DEVICES                       | 24 to 27 |
| STANDARD AND REVERSE MOUNTING        | 28       |
| APPLICATIONS                         | 29       |
| OTHER TRANSFLUID PRODUCTS            | 30       |

# DESCRIPTION & OPERATING CONDITIONS

## DESCRIPTION

The TRANSFLUID coupling (K series) is a constant filling type comprising three main elements:

- 1 Driving impeller (pump) mounted on the input shaft.
- 2 Driven impeller (turbine) mounted on the output shaft.
- 3 Cover, flanged to the output impeller, with an oil-tight seal.

The first two elements can work both as pump and/or turbine.

## OPERATING CONDITIONS

The TRANSFLUID coupling is a hydrokinetic transmission. The impellers perform like a centrifugal pump and a hydraulic turbine. With an input drive to the pump (i.e. electric motor or Diesel engine) kinetic energy is transferred to the oil in the coupling. The oil moves by centrifugal force across the blades of the turbine towards the outside of the coupling.

This absorbs the kinetic energy and develops a torque which is always equal to input torque thus causing rotation of the output shaft. The wear is practically zero since there are no mechanical connections.

The efficiency is influenced only by the speed difference (slip) between pump and turbine.


The slip is essential to the functioning of the coupling: there could not be torque transmission without slip! The formula for slip, from which the power loss can be deduced is as follows:

$$\text{slip \%} = \frac{\text{input speed} - \text{output speed}}{\text{input speed}} \times 100$$

In normal conditions (standard duty), slip can vary from 1.5% (large power) to 6% (small power).

TRANSFLUID couplings follow the laws of all centrifugal machines:

- 1 Transmitted torque is proportional to the square of input speed;
- 2 Transmitted power is proportional to the cube of input speed;
- 3 Transmitted power is proportional to the fifth power of circuit outside diameter.

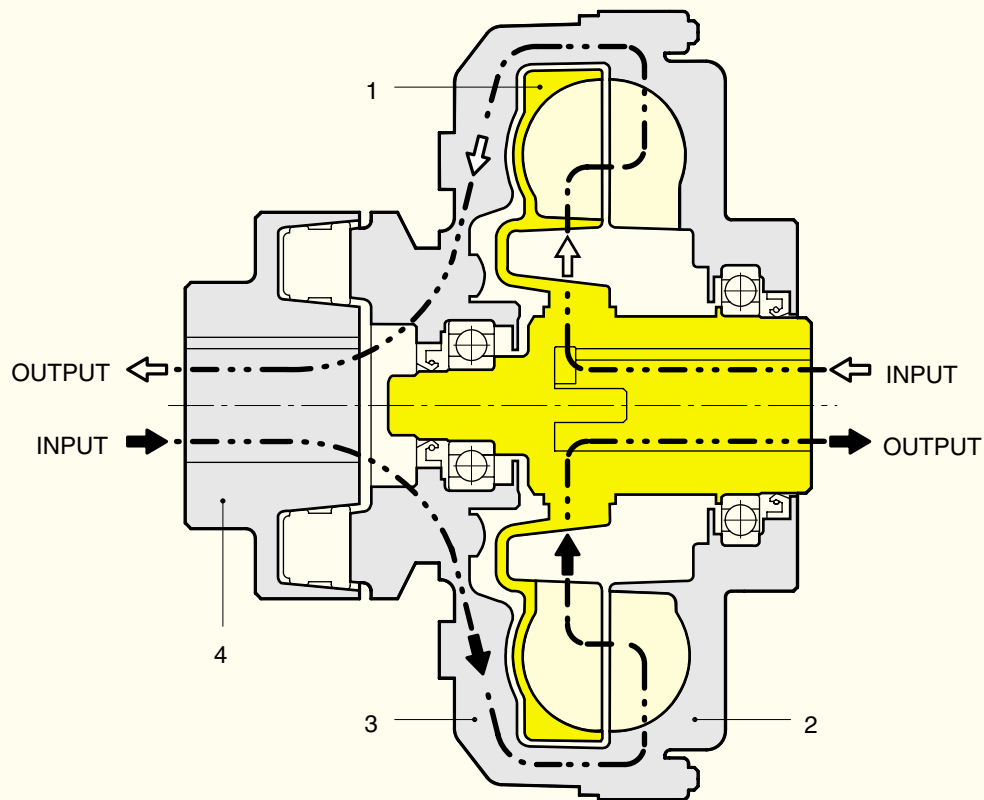

- 1 INTERNAL IMPELLER
- 2 EXTERNAL IMPELLER
- 3 COVER
- 4 FLEX COUPLING

# FITTED ON ELECTRIC MOTORS

## TRANSFLUID COUPLING FITTED ON ELECTRIC MOTORS

Three phase synchronous squirrel cage motors are able to supply maximum torque only near 100% synchronous speed. Direct starting the system utilizes the most current. Figure 1 illustrates the relationship between torque and current. It can be seen that the absorbed current is proportional to the torque only between 85% and 100% of the synchronous speed. With a motor connected directly to the load, there are the following disadvantages:

- The difference between available torque and the torque required by the load is very low until the rotor has accelerated to between 80-85% of the synchronous speed
- The absorbed current is high (up to 6 times the nominal current) throughout the starting phase causing overheating of the windings, overloads in the electrical lines and, in cases of frequent starts, major production costs.
- Oversized motors are required by the limitations indicated above.

To limit the absorbed current of the motor during the acceleration of the load, a Y-Δ (wye – delta) starting system is frequently used which reduces the absorbed current by about 1/3 during starting. Unfortunately, during operation of the motor under the delta configuration, the available torque is also reduced by 1/3 and for machines with high inertias to accelerate, oversizing of the motor is still required. Finally, this system does not eliminate current peaks originating from the insertion or the commutation of the device.

Any drive system using a Transfluid fluid coupling has the advantage of the motor starting without load. Figure 2 compares the current demands of an electric motor when the load is directly attached versus the demand when a fluid coupling is mounted between the motor and load. The colored area shows the energy that is lost, as heat, during start-up when a fluid coupling is not used. A Transfluid fluid coupling reduces the motor's current draw during start-up thus reducing peak current demands. This not only reduces power costs but also reduces brown outs in the power grid and extends the life of the motor. Also at start-up, a fluid coupling allows more torque to pass to the load for acceleration than in drive systems without a fluid coupling.

Figure 3 shows two curves for a single fluid coupling and a characteristic curve of an electric motor. It is obvious from the stall curve of the fluid coupling (s=100%) and the available motor torque, how much torque is available to accelerate the rotor of the motor (colored area). In about 1 second, the rotor of the motor accelerates passing from point A to point B. The acceleration of the load, however, is made gradually by the fluid coupling, utilizing the motor in optimal conditions, along the part of the curve between point B, 100% and point C, 2-5%. Point C is the typical point of operation during normal running.

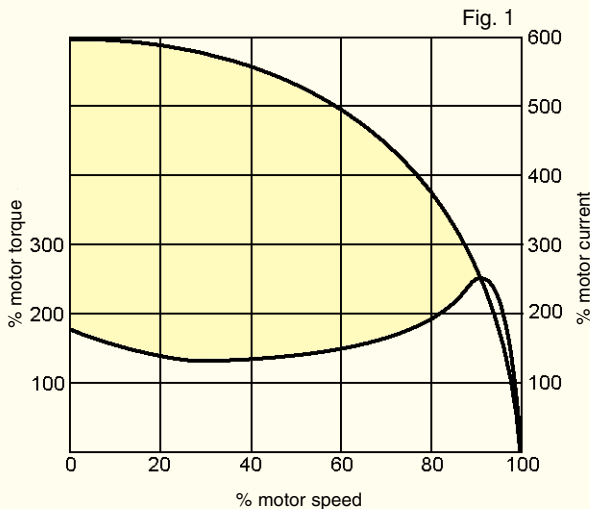


Fig. 1

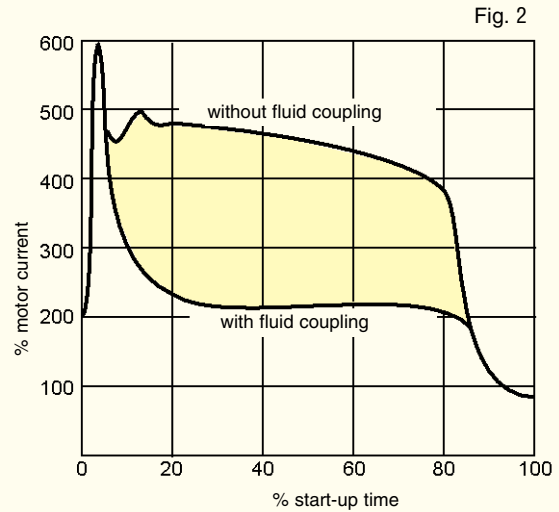


Fig. 2

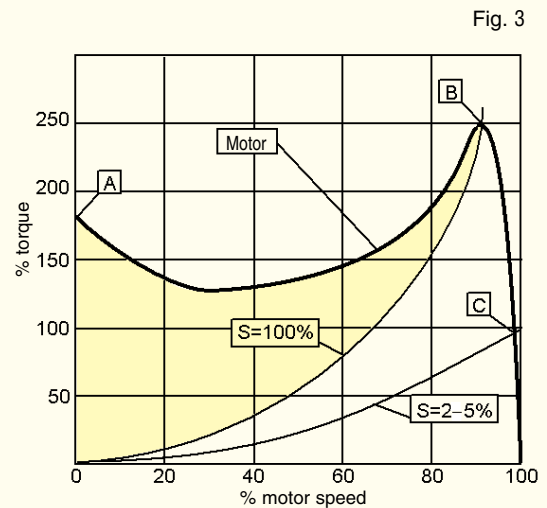


Fig. 3

# DELAYED FILL CHAMBER ADVANTAGES

## TRANSFLUID FLUID COUPLINGS WITH A DELAYED FILL CHAMBER

With the standard circuit in a maximum oil fill condition, fluid couplings may transmit over 200% of the nominal motor torque. It is possible to decrease the starting torque down to 160% of the nominal torque, by decreasing oil fill. This, however, leads to higher slip and working temperature in the fluid coupling, during the steady running conditions.

The most convenient solution to provide lower starting torque while maintaining low slip at steady running is to provide a delayed fill chamber mounted on the main circuit. This chamber holds a percentage of the oil which at start-up is gradually released into the main circuit through calibrated bleed orifices as the coupling spins. For couplings sized 15CK and above these orifices are set in externally mounted valves.

The external mounting provides easy adjustment of the orifice size which controls starting time and the maximum transmitted torque.

When the coupling is at rest, the delay fill chamber contains a percentage of oil quantity in the main circuit (Fig. 4a). This reduces the torque the coupling transmits and allows the motor to quickly reach its steady running speed, as if it was started without load.

As the coupling accelerates, the oil flows from the delay fill chamber to the main circuit (Fig. 4b) at a rate proportional to the coupling's rotational speed.

The oil continues to transfer from the delay fill chamber to the main circuit emptying the delay fill chamber. Once all the oil is in the main circuit (Fig. 4c) the coupling is then transmitting 100% of the motor torque and the minimum slip value is reached.


With a single delay fill chamber, the ratio between starting and nominal torque may reach 150 %. This ratio can be reduced to 120 % with a double delay fill chamber. This lower start-up torque results from a smaller amount of oil in the main circuit due to more oil in the bigger delay fill chamber.

Fluid couplings with single or double delay fill chamber provide very smooth start-ups with low start-up torque transmission, and this makes them excellent for applications with high inertia loads and for use on belt conveyors.

The single size chamber is available from size 11CK and above. The double size chamber is available from size 15CCK and above

## SUMMARY OF THE ADVANTAGES GIVEN BY FLUID COUPLINGS:




- Very smooth start-ups
- Reduction of absorbed current during the starting phase: the motor starts with very low load
- Protection of the motor and the driven machine from jams and overloads
- Utilization of asynchronous squirrel cage motors instead of special motors with soft start devices
- Longer life and up time of the whole drive train, thanks to the protection provided by the fluid coupling
- Energy saving, due to current peak reduction
- Limits starting torque to 120% with a double delayed fill chamber
- Same torque at input and output: the motor can supply the maximum torque even when load is jammed
- Torsional vibration absorption for internal combustion engines, thanks to the presence of a fluid as a power transmission element
- Possibility to achieve a high number of start-ups, or reversal of the rotational direction.
- Load balancing with dual motor drive: fluid couplings automatically adjust load speed to the individual motor's speed
- High efficiency and minimum maintenance
- Viton rotating seals and O-rings

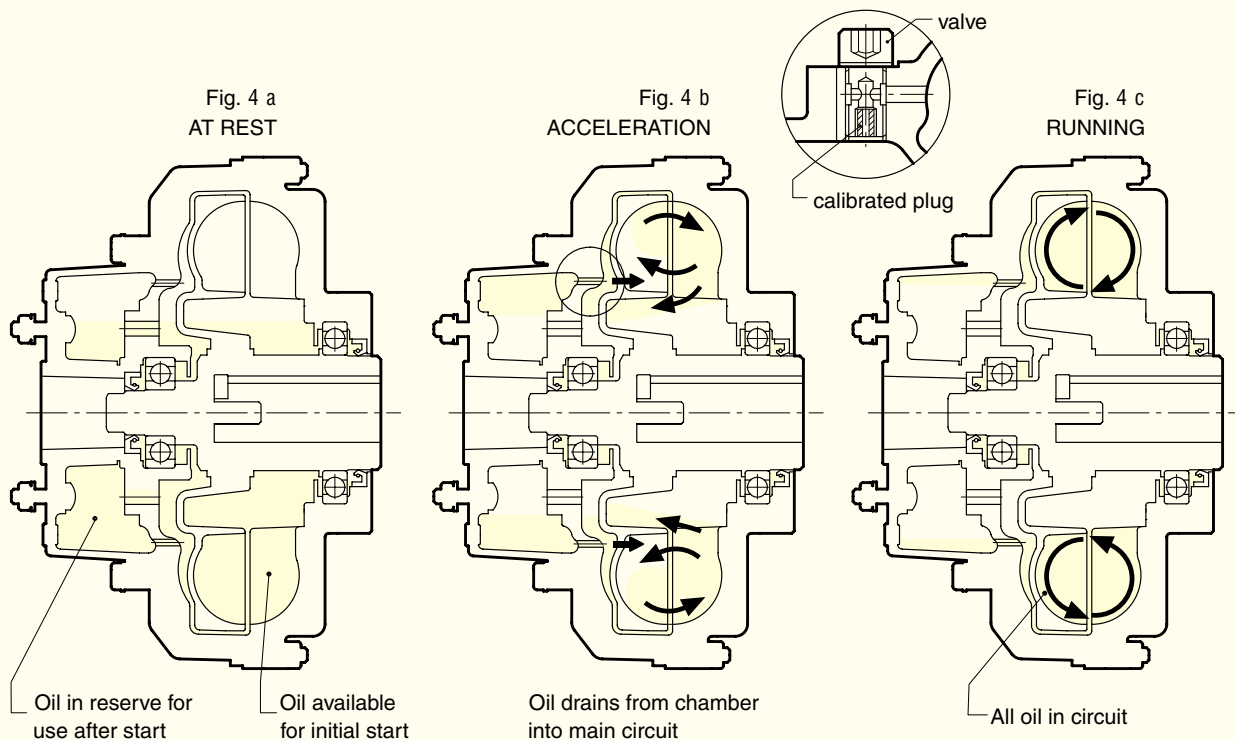

# STARTING TORQUE CHARACTERISTICS

## CHARACTERISTIC CURVES


- MI : transmitted torque from fluid coupling
- Mm : starting torque of the electric motor
- Mn : nominal torque at full load
- ..... : accelerating torque

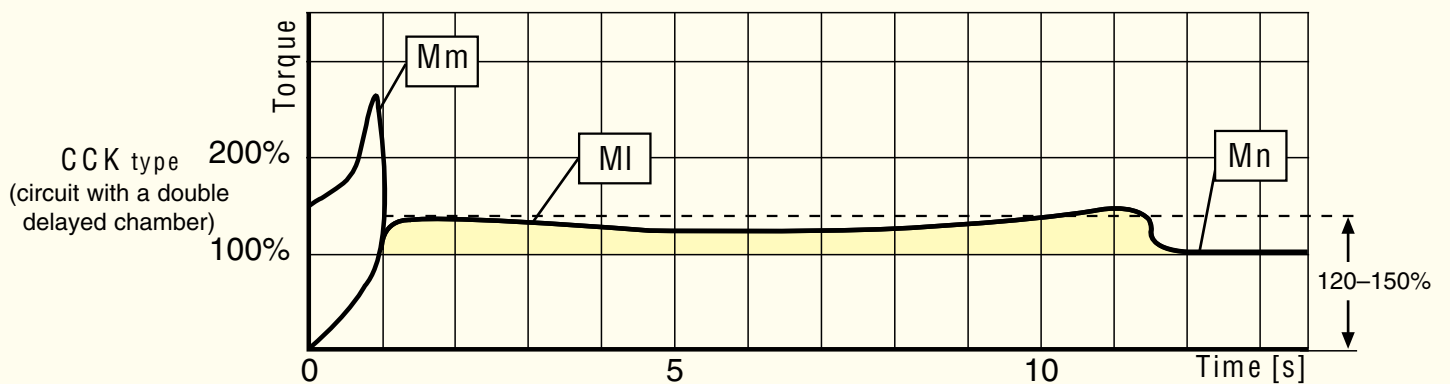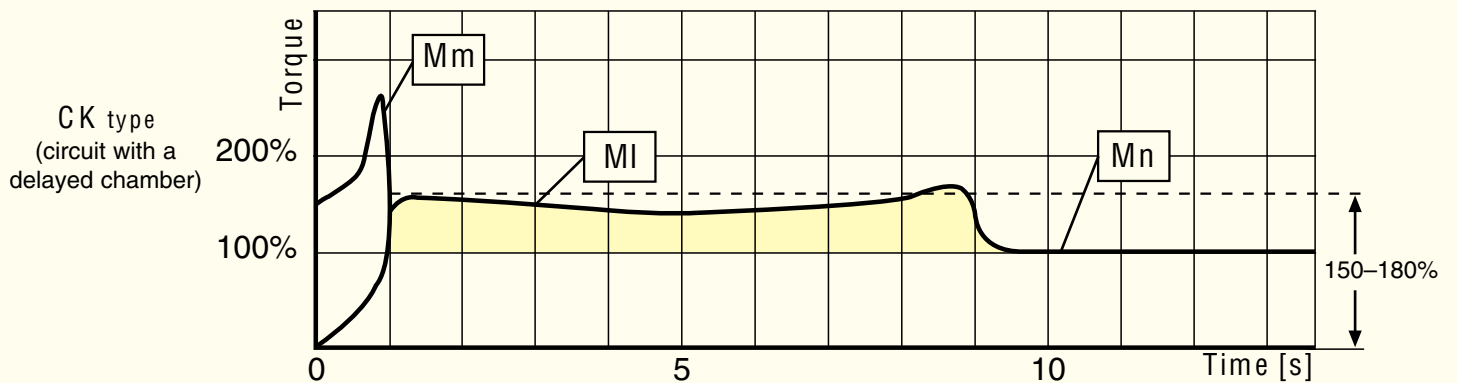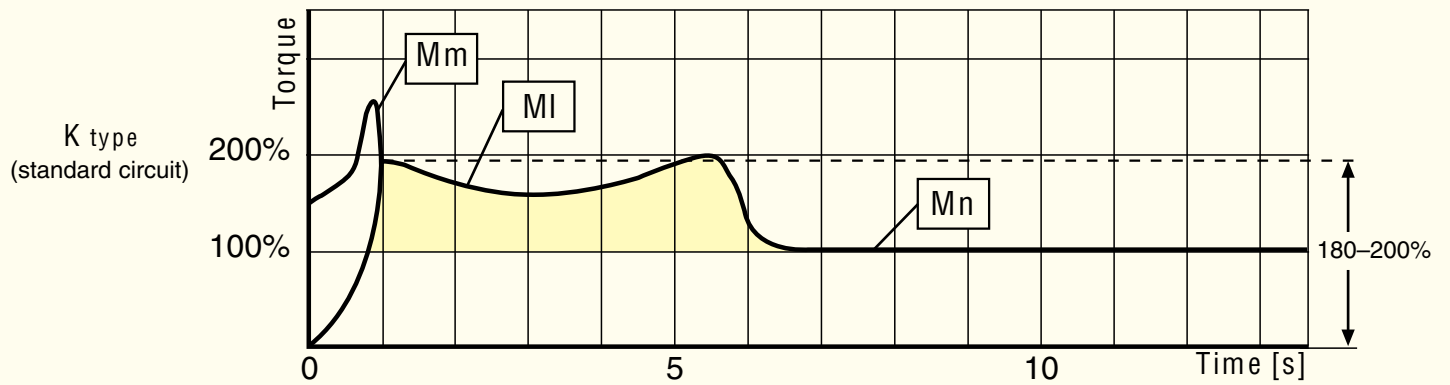


# STANDARD MODELS

## IN LINE

- KR-CKR-CCKR** : Basic coupling (KR), with a single (CKR) or double (CCKR) delayed fill chamber.
- KRG-CKRG-CCKRG** : Basic coupling with elastic coupling (KRM-CKRM-CCKRM (clamp type), or superelastic.
- KRB-CKRB-CCKRB** : like ..KRG, but with brake drum or ...KRBP
- KRD-CKRD-CCKRD** : basic coupling ..KR with output shaft. It allows the utilization of other flex couplings; it is possible to place it (with a convenient housing) between the motor and a hollow shaft gearbox.
- EK** : fluid coupling fitted with a bell housing, to be placed between a flanged electric motor and a hollow shaft gearbox.
- KCM-CKCM-CCKCM** : basic coupling for half gear couplings.
- KCG-CKCG-CCKCG** : basic ..KCM with half gear couplings. On request, is available with brake drum or brake disc.
- KDM-CKDM-CCKDM** : fluid coupling with disc couplings.
- ...KDMB** : like ..KDM, but with brake drum or brake disc.
- ...KDMBP**

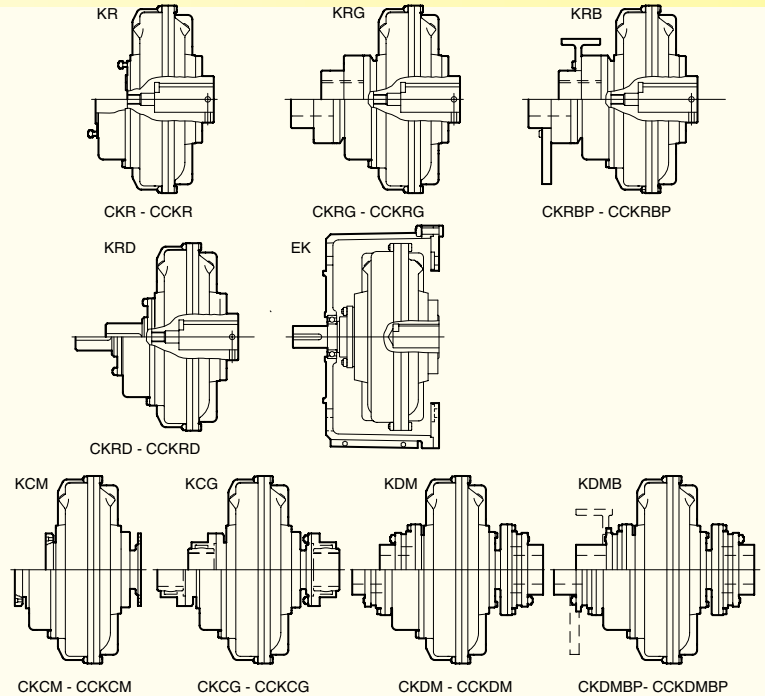

Note: The ..KCG - ..KDM versions allow a radial disassembly without moving the motor or the driven machine.

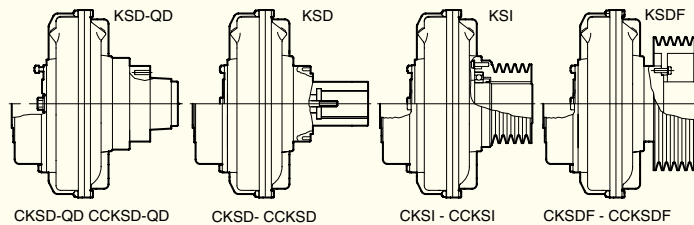


## PULLEY

- KSD-QD-CCKSD-QD** : fluid coupling that will use a QD style pulley CCKSD-QD
- KSD-CCKSD-CCKSD** : basic coupling that accepts a flanged pulley, with single (CK..) or double (CCK..) delayed fill chamber
- KSI-CCKSI-CCKSI** : fluid coupling with an incorporated pulley, which is fitted from inside.
- KSDF-CCKSDF CCKSDF** : basic ..KSD coupling with flanged pulley, externally mounted and therefore to be easily disassembled.


## IN LINE VERSIONS MOUNTING EXAMPLES

- Fig. A Horizontal axis between the motor and the driven machine (KR-CKR-CCKR and similar).
- Fig. B It allows a radial disassembly without moving the motor and the driven machine (KCG-KDM and similar).
- Fig. C Between a flanged electric motor and a hollow shaft gearbox by means of a bell housing (..KRD and EK).
- Fig. D Vertical axis mounting between the electric motor and a gearbox or driven machine. When ordering, please specify motor shaft pointing up (type 1) or motor shaft pointing down (type 2).
- Fig. E Between the motor and a supported pulley for high powers and heavy radial loads.

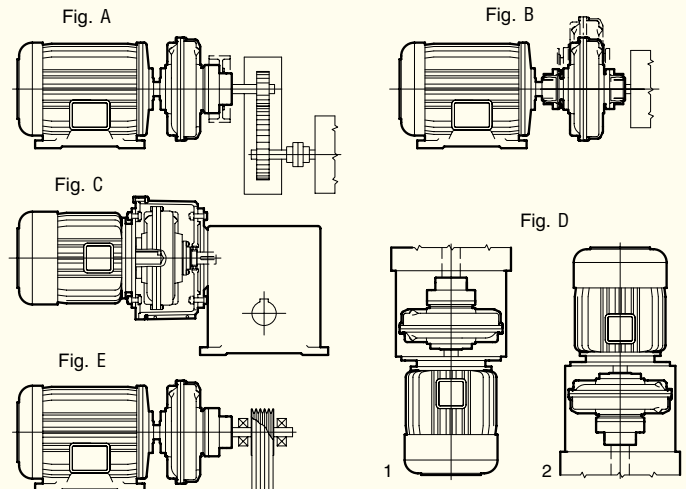

## PULLEY VERSIONS MOUNTING EXAMPLES

- Fig. F Horizontal axis.
- Fig. G Vertical axis. When ordering, please specify motor shaft pointing up (type 1) or motor shaft pointing down (type 2).

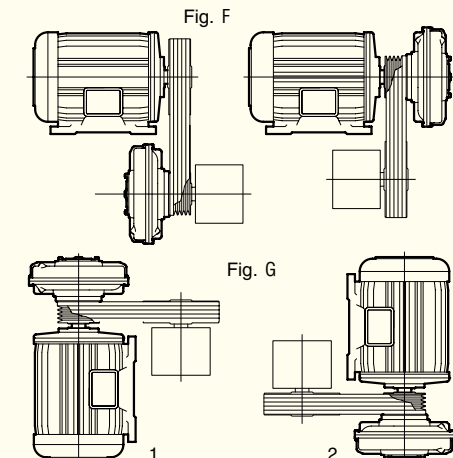


# SELECTION

## SELECTION

### SELECTION CHART

The chart below may be used to select a unit size from the horsepower and input speed. If the selection point falls on the line dividing one size from the other, select the larger size with a proportionally reduced oil fill.

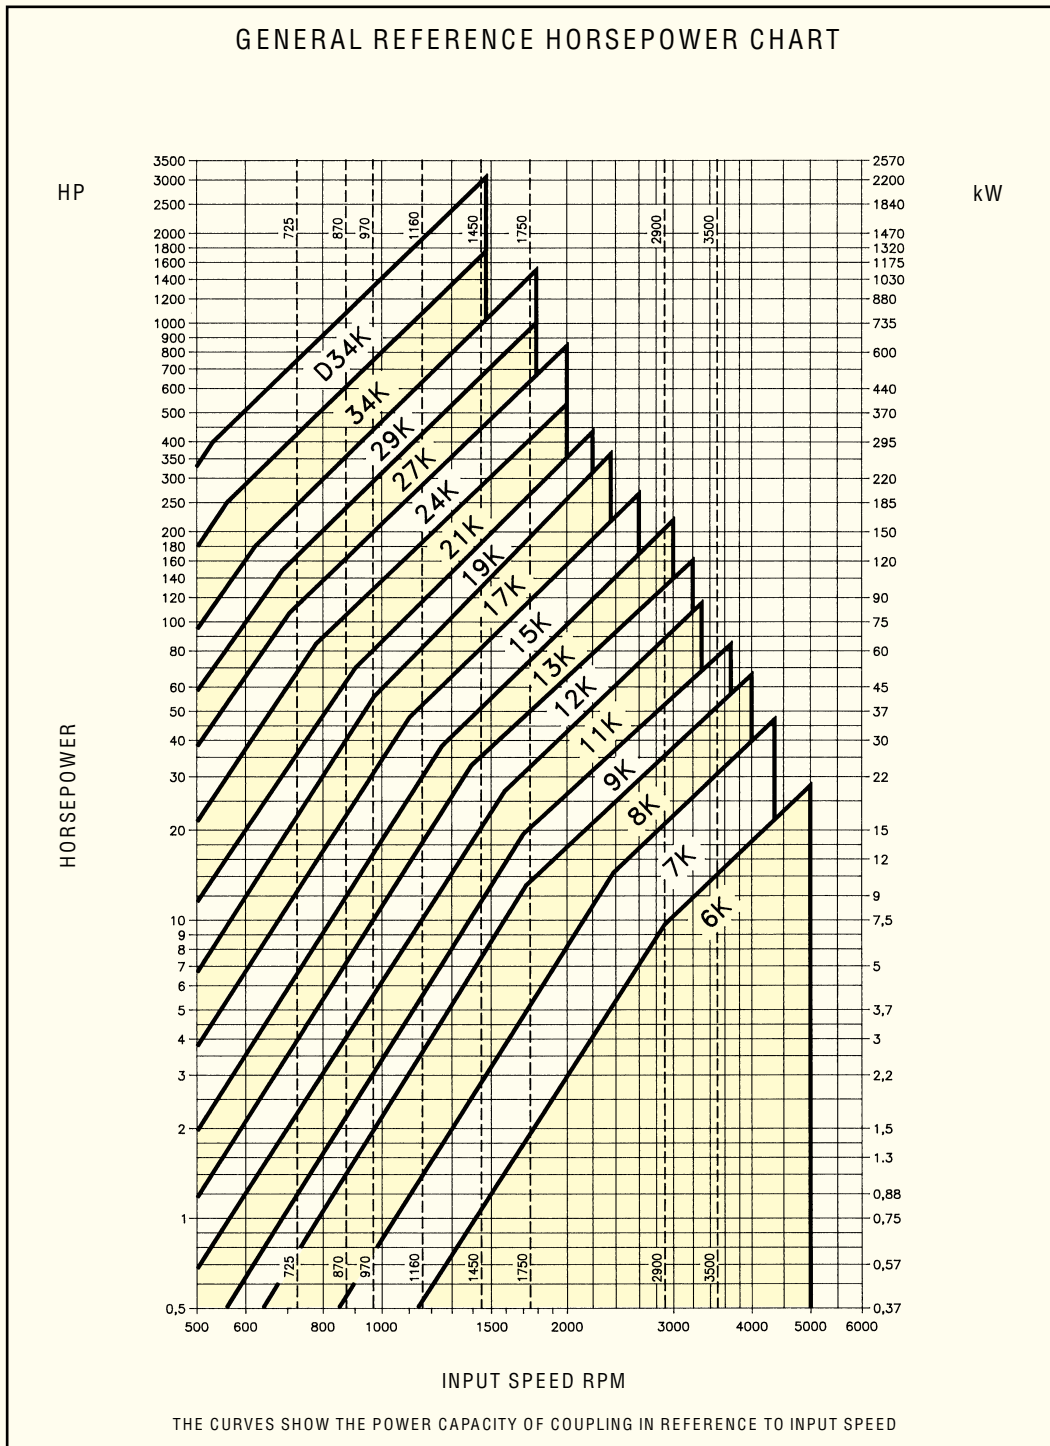

# SELECTION

## SELECTION TABLE


Fluid couplings for standard electric motor

| MOTOR                |                         | (1) 3600 rpm |          | 1800 rpm |          | 1200 rpm |          | 900 rpm |          |
|----------------------|-------------------------|--------------|----------|----------|----------|----------|----------|---------|----------|
| FRAME                | SHAFT DIA.<br>mm (inch) | HP           | COUPLING | HP       | COUPLING | HP       | COUPLING | HP      | COUPLING |
| 143T                 | 22.275<br>(0.875)       | 1.5          | 6 K      | 1        | 6 K      | 0.75     | 7 K      | 0.5     | 7 K      |
| 145T                 |                         | 2            |          | 1.5 - 2  |          | 1        |          | 0.75    | 8 K      |
| 182T                 | 28.575<br>(1.125)       | 3            | 7 K      | 3        | 7 K      | 1.5      | 8 K      | 1       | 9 K      |
| 184T                 |                         | 5            |          | 5        |          | 2        |          | 1.5     |          |
| 213T                 | 34.925<br>(1.375)       | 7.5          |          | 7.5      | 3        | 3        |          | 3       | 11 K     |
| 215T                 |                         | 10 - 15      |          | 10       | 5        | 5        |          | 12 K    |          |
| 254                  | 41.275<br>(1.625)       | 15 - 20      | 8 K      | 15       | 9 K      | 7.5      | 11 K     | 5       | 12 K     |
| 256T                 |                         | 20 - 25      |          | 20       |          | 10       |          | 7.5     | 13 K     |
| 284T                 | 47.625<br>(1.875)       | -            | -        | 25       | 11 K     | 15       | 12 K     | 10      | -        |
| 284TS                | 41.275<br>(1.625)       | 30           | 9K       | -        | -        | -        | -        | -       | -        |
| 286T                 | 47.625<br>(1.825)       | -            | -        | 30       | 12 K     | 20       | 13 K     | 15      | 15 K     |
| 286TS                | 41.275<br>(1.625)       | 40           | 9K       | -        | -        | -        | -        | -       | -        |
| 324T                 | 53.975<br>(2.125)       | -            | -        | 40       | 12 K     | 25       | 13 K     | 20      | 17 K     |
| 324TS                | 47.625<br>(1.875)       | 50           | 9K       | -        | -        | -        | -        | -       | -        |
| 326T                 | 53.975<br>(2.125)       | -            | -        | 50       | 13 K     | 30       | 15 K     | 25      | 17 K     |
| 364T                 | 60.325<br>(2.375)       | -            | -        | 60       |          | 40       |          | 30      |          |
| 365T                 |                         | -            | -        | 75       | 50       | 40       | 19 K     |         |          |
| 404T                 | 73.025<br>(2.875)       | -            | -        | 100      | 17 K     | 60       | 17 K     | 50      | 19 K     |
| 405T                 |                         | -            | -        | 125      |          | 75       |          | 60      |          |
| 444T                 | 85.725<br>(3.375)       | -            | -        | 150      | 19 K     | 100      | 19 K     | 75      | 21 K     |
| 445T                 |                         | -            | -        | 200-250  |          | 125      |          | 100     |          |
| NON - STANDARD MOTOR |                         |              |          | max      |          | max      |          | max     |          |
|                      |                         |              |          | 400      | 21 K     | 270      | 24 K     | 150     | 24 K     |
|                      |                         |              |          | 600      | 24 K     | 400      | 27 K     | 220     | 27 K     |
|                      |                         |              |          | 958      | 27 K     | 598      | 29 K     | 350     | 29 K     |
|                      |                         |              |          | 1360     | 29 K     | 1088     | 34 K     | 600     | 34 K     |
|                      |                         |              |          |          |          | 1350     | D 34 K   | 1000    | D 34 K   |

General note: The fluid coupling size is tied to the motor shaft dimensions

(1) Special version, 24 hours/day service

# SERIES 6 ÷ 9 KR

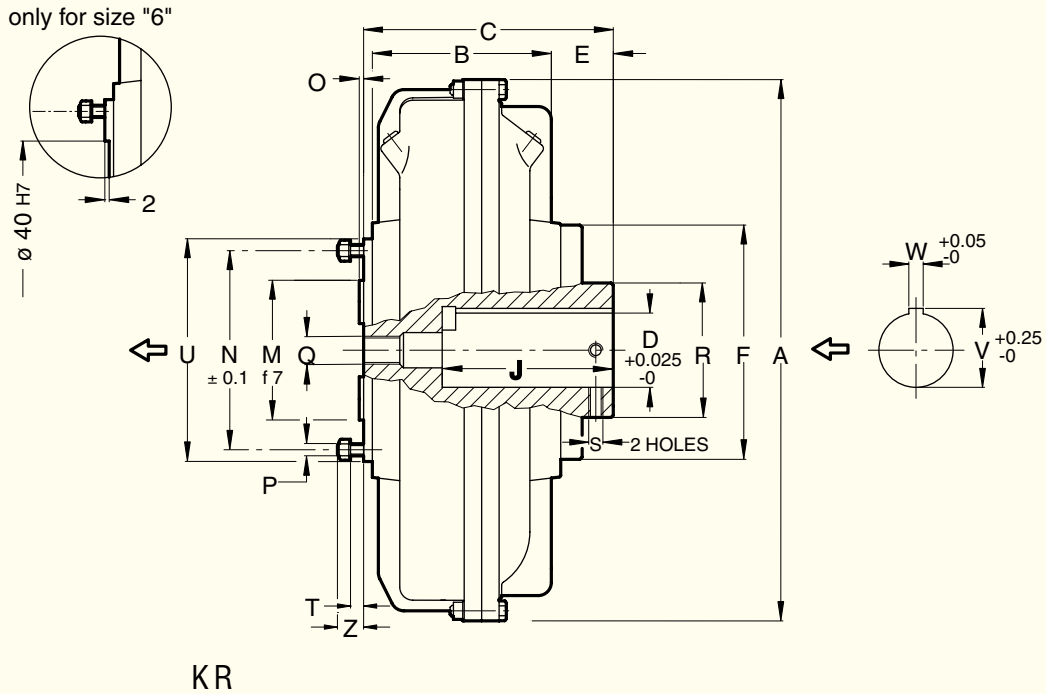


Note: The arrows ← → indicate input and output of the standard version.

Dimensions

| Size | D       |       | J    | W     | V    | A   | B  | C    | E  | F   | M  | N    | O | P   |                  | Q                | R                 | S                 | T   | U  | Z    | Weight<br>kg<br>(less oil) | Oil It<br>max |
|------|---------|-------|------|-------|------|-----|----|------|----|-----|----|------|---|-----|------------------|------------------|-------------------|-------------------|-----|----|------|----------------------------|---------------|
|      | mm.     | inch  |      |       |      |     |    |      |    |     |    |      |   | Nr. | $\varnothing$    |                  |                   |                   |     |    |      |                            |               |
| 6    | •22.225 | .875  | 57.2 | 4.762 | 24.5 | 195 | 60 | 90.5 | 29 | 88  | *  | 53   | * | 4   |                  | -                | 33                | 1/4<br>20<br>UNC  |     | 68 | 16.5 | 2.7                        | 0.5           |
|      | 15.875  | .625  | 47.6 |       | 18   |     |    |      |    |     |    |      |   |     |                  |                  |                   |                   |     |    |      |                            |               |
| 7    | •34.925 | 1.375 | 79.4 | 7.937 | 38.6 | 228 | 77 | 124  | 34 | 114 | 60 | 73   | 3 | 6   | 7                | 1/2<br>13<br>UNC | 50                | 5/16<br>18<br>UNC | 6   | 88 | 14   | 5.1                        | 0.92          |
|      | 28.575  | 1.125 | 63.5 |       | 6.35 |     |    |      |    |     |    |      |   |     |                  |                  |                   |                   |     |    |      |                            |               |
| 8    | •34.925 | 1.375 | 79.4 | 7.937 | 38.6 | 256 | 91 | 129  | 30 |     |    |      |   |     |                  |                  |                   |                   |     |    | 15   | 5.5                        | 1.5           |
|      | 28.575  | 1.125 | 63.5 |       | 6.35 |     |    |      |    |     |    |      |   |     |                  |                  |                   |                   |     |    |      |                            |               |
| 9    | •41.275 | 1.625 | 95.3 | 7.937 | 45.6 | 295 | 96 | 160  | 46 | 128 | 80 | 88.9 | 8 | 8   | 3/4<br>10<br>UNC | 70               | 7/16<br>14<br>UNC |                   | 107 |    | 10   | 1.95                       |               |
|      | 34.925  | 1.375 | 79.4 |       | 38.6 |     |    |      |    |     |    |      |   |     |                  |                  |                   |                   |     |    |      |                            |               |

- MAX BORE WITH A KEYWAY AS PER USAS SQUARE B17.1
- \* SEE DRAWING
- WHEN ORDERING, SPECIFY SIZE, MODEL AND D DIAMETER, EXAMPLE: 7 KR D. 34.925

DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

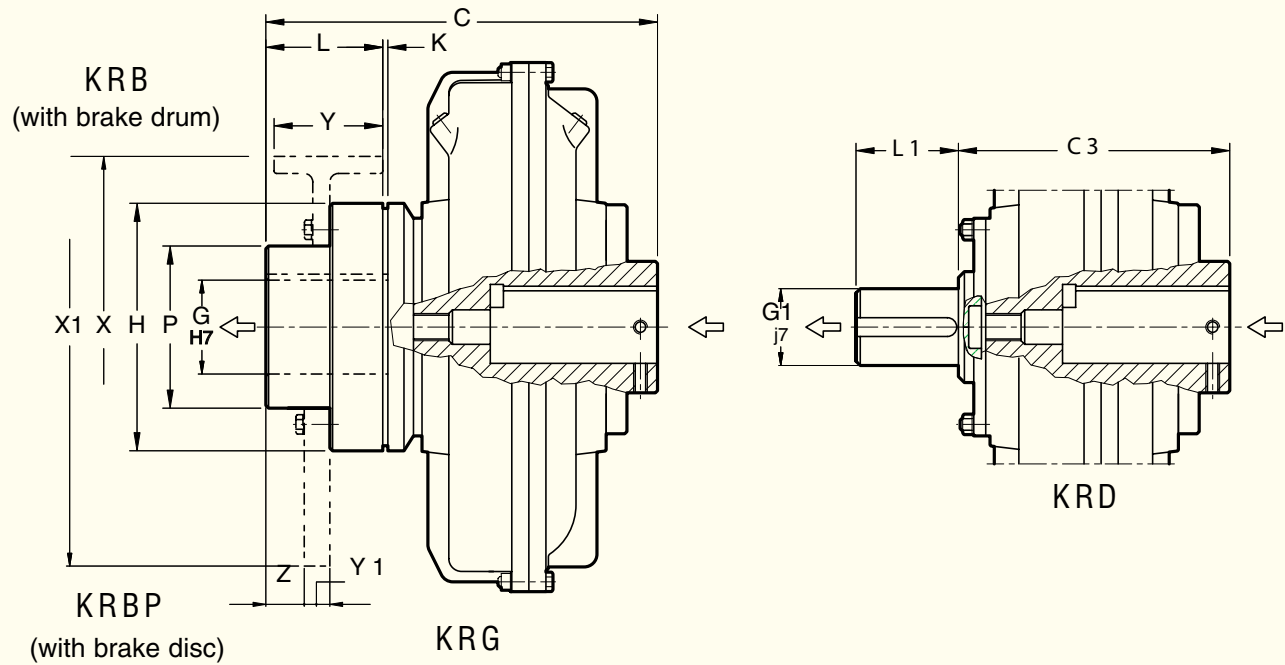

Note: The arrows  $\leftarrow$  indicate input and output of the standard version.


↔ Dimensions mm

| Size | C   | C <sub>3</sub> | G<br>max | G <sub>1</sub> | H   | K | L  | L <sub>1</sub> | P  | Flex<br>coupling | Brake<br>drum<br>X x Y | Weight kg<br>(less oil) |      |
|------|-----|----------------|----------|----------------|-----|---|----|----------------|----|------------------|------------------------|-------------------------|------|
|      |     |                |          |                |     |   |    |                |    |                  |                        | KRG                     | KRD  |
| 6    | 149 | 107            | 28       | 22.225         | 73  | 2 | 40 | 41.275         | 45 | BT02             | on request             | 3.9                     | 3    |
| 7    | 201 | 145            | 42       | 34.925         | 110 |   | 60 | 50.8           | 70 | BT10             | 160 x 60               | 8.3                     | 5.7  |
| 8    | 206 | 150            |          |                |     |   | 80 | 63.5           | 85 | BT20             |                        | 160 x 60<br>200 x 75    | 8.7  |
| 9    | 261 | 191            | 55       | 47.625         | 132 |   | 80 | 63.5           | 85 | BT20             | 160 x 60<br>200 x 75   | 16                      | 11.6 |


- G<sub>1</sub> SHAFT WITH SQUARE KEYWAY AS PER USAS B17.1
- UPON REQUEST: BORE G MACHINED - G<sub>1</sub> SPECIAL SHAFT
- WHEN ORDERING, SPECIFY SIZE, MODEL AND D DIAMETER, EXAMPLE: 8 KRB D.28.575  
BRAKE DRUM 160 x 60

DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE


# SERIES 11 ÷ 34 KR / CKR / CCKR

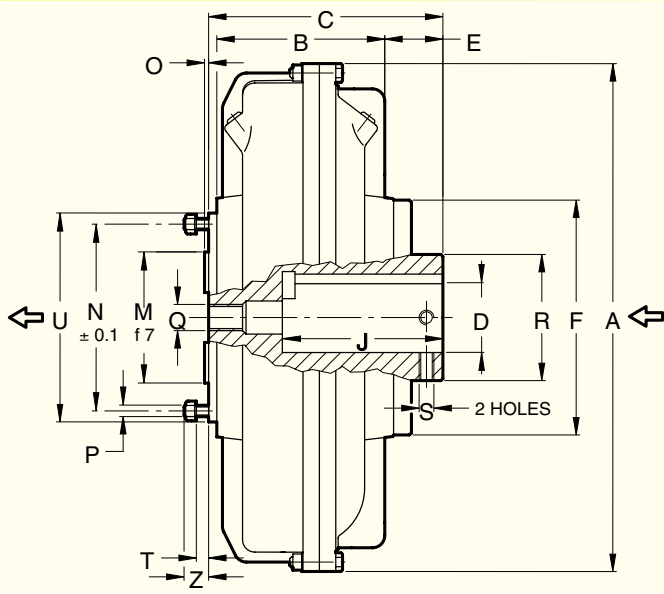


KR

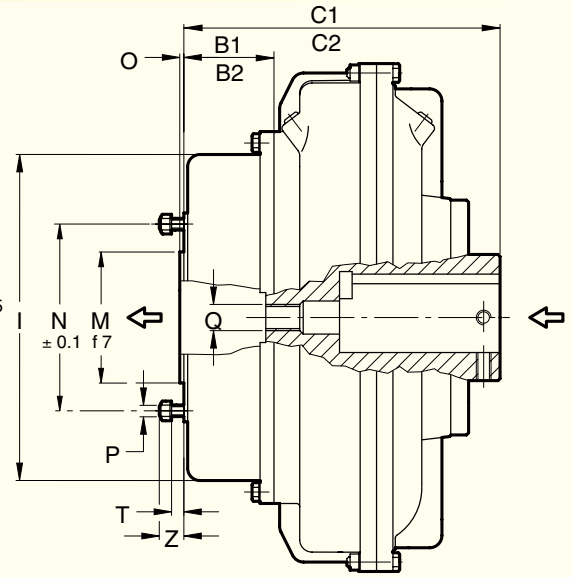

CKR - CCKR

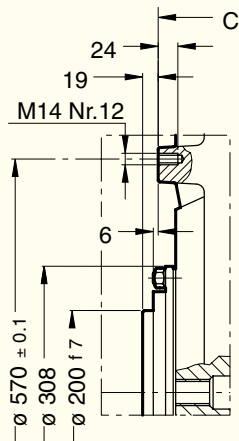

34 KR

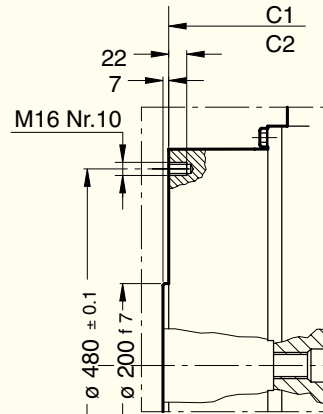

34 CKR-CCKR

| Size | Weight Kg (less oil) |      |      | Oil max lt |      |      |
|------|----------------------|------|------|------------|------|------|
|      | KR                   | CKR  | CCKR | KR         | CKR  | CCKR |
| 11   | 12                   | 14.5 | -    | 2.75       | 3.35 | -    |
| 12   | 155                  | 18.5 | -    | 4.1        | 4.8  | -    |
| 13   | 24                   | 27   | -    | 5.2        | 5.8  | -    |
| 15   | 37                   | 41   | 48.7 | 7.65       | 8.6  | 9.3  |
| 17   | 51                   | 57   | 66   | 11.7       | 13.6 | 14.9 |
| 19   | 58                   | 64   | 73   | 14.2       | 16.5 | 18.5 |
| 21   | 87                   | 97   | 105  | 19         | 23   | 31   |
| 24   | 105                  | 115  | 129  | 28.4       | 31.2 | 39   |
| 27   | 161                  | 179  | 198  | 42         | 50   | 61   |
| 29   | 214                  | 232  | 242  | 55         | 63   | 73   |
| 34   | 350                  | 367  | 377  | 82.5       | 92.5 | 101  |

Dimensions

Note: The arrows indicate input and output of the standard version.





| Size | D        |       | J   | W      | V     | A   | B   |      | B <sub>1</sub> | B <sub>2</sub> | C   | C <sub>1</sub> |     | C <sub>2</sub> | E   | F   | I   | M     | N  | O  | P   | Q                 | R          | S                 | T  | U   | Z  |
|------|----------|-------|-----|--------|-------|-----|-----|------|----------------|----------------|-----|----------------|-----|----------------|-----|-----|-----|-------|----|----|-----|-------------------|------------|-------------------|----|-----|----|
|      | mm.      | inch  |     |        |       |     | KR  | CKR  |                |                |     | KR             | CKR |                |     |     |     |       |    |    |     |                   |            |                   |    |     |    |
| 11   | 47.625** | 1.875 | 111 | 12.7   | 50    | 325 | 107 | 68.5 |                |                |     | 215            |     | 42             | 128 | 195 | 60  | 88.9  | 8  | 6  | M8  | 3/4<br>10<br>UNC  | 70         | 7/16<br>14<br>UNC | 6  | 107 | 15 |
|      | 41.275   | 1.625 |     |        |       |     |     |      |                |                |     |                |     |                |     |     |     |       |    |    |     |                   |            |                   |    |     |    |
| 13   | 60.325** | 2.375 | 143 | 15.875 | 63    | 398 | 137 | 75   |                |                | 199 | 258            |     | 46             | 179 | 224 | 80  | 122.2 | 5  | 8  | M10 | 7/8<br>9<br>UNC   | 101        | 5/8<br>11<br>UNC  |    | 156 |    |
|      | 53.975   | 2.125 |     |        |       |     |     |      |                |                |     |                |     |                |     |     |     |       |    |    |     |                   |            |                   |    |     |    |
| 15   | 73.025** | 2.875 | 178 | 19.05  | 76    | 460 | 151 | 87   | 135            | 226            | 294 | 342            |     | 62             | 225 | 337 | 125 | 160   | 15 | 12 | M10 | 1 1/4<br>7<br>UNC | 136        | 3/4<br>10<br>UNC  | 8  | 180 |    |
|      | 60.325   | 2.375 |     |        |       |     |     |      |                |                |     |                |     |                |     |     |     |       |    |    |     |                   |            |                   |    |     |    |
| 17   | 85.725** | 3.375 | 194 | 22.225 | 92.3  | 520 | 170 | 96   | 176            | 248            | 328 | 408            |     | 71             | 250 | 400 | 160 | 228   | 5  | 8  | M14 | 1 3/4<br>5<br>UNC | 185<br>205 | 7/8<br>9<br>UNC   | 14 | 255 | 30 |
|      | 73.025   | 2.875 |     |        |       |     |     |      |                |                |     |                |     |                |     |     |     |       |    |    |     |                   |            |                   |    |     |    |
| 19   | 98.425** | 3.875 | 216 | 25.4   | 104.3 | 620 | 205 | 110  | 200            | 286            | 386 | 476            |     | 41             | 315 | 537 | 200 | 275   | 7  |    | M16 | 1 3/4<br>5<br>UNC | 185<br>205 | 7/8<br>9<br>UNC   |    | 308 | 33 |
|      | 85.725   | 3.375 |     |        |       |     |     |      |                |                |     |                |     |                |     |     |     |       |    |    |     |                   |            |                   |    |     |    |
| 24   | 120.65** | 4.750 | 216 | 31.75  | 129.8 | 780 | 278 |      |                |                |     |                |     | 41             | 315 | 537 | 200 | 275   | 7  |    | M16 | 1 3/4<br>5<br>UNC | 185<br>205 | 7/8<br>9<br>UNC   |    | 308 | 33 |
|      | 85.725   | 3.375 |     |        |       |     |     |      |                |                |     |                |     |                |     |     |     |       |    |    |     |                   |            |                   |    |     |    |
| 27   | 133.35** | 5.250 | 241 | 31.75  | 142.7 | 860 | 295 |      |                |                |     |                |     | 41             | 315 | 537 | 200 | 275   | 7  |    | M16 | 1 3/4<br>5<br>UNC | 185<br>205 | 7/8<br>9<br>UNC   |    | 308 | 33 |
|      | 150.8**  | 5.938 |     |        |       |     |     |      |                |                |     |                |     |                |     |     |     |       |    |    |     |                   |            |                   |    |     |    |

\*\* MAX BORE WITH REDUCED V DEPTH KEY WAY  
 \* SEE DRAWING  
 - WHEN ORDERING, SPECIFY SIZE, MODEL AND D DIAMETER, EXAMPLE: 29 CCKR D. 133.36

Dim. D tolerance  
 up to 50.8  $\begin{matrix} +0.025 \\ -0 \end{matrix}$   
 from 50.8 to 101.6  $\begin{matrix} +0.038 \\ -0 \end{matrix}$   
 from 101.6 to 152.4  $\begin{matrix} +0.05 \\ -0 \end{matrix}$

Dim. W tolerance  
 up to 12.7  $\begin{matrix} +0.05 \\ -0 \end{matrix}$   
 from 15.875 to 25.4  $\begin{matrix} +0.076 \\ -0 \end{matrix}$   
 from 25.4 to 38.1  $\begin{matrix} +0.1 \\ -0 \end{matrix}$

DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

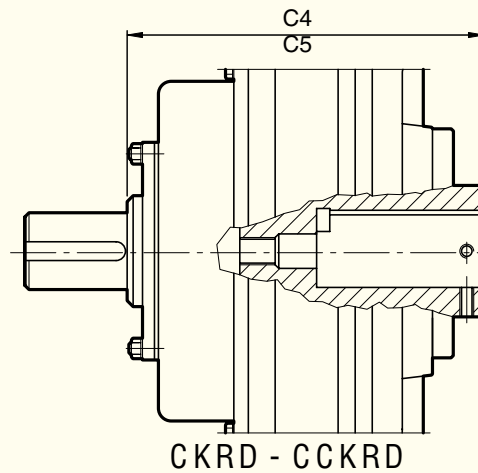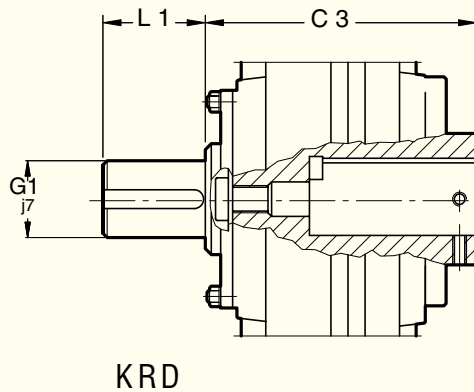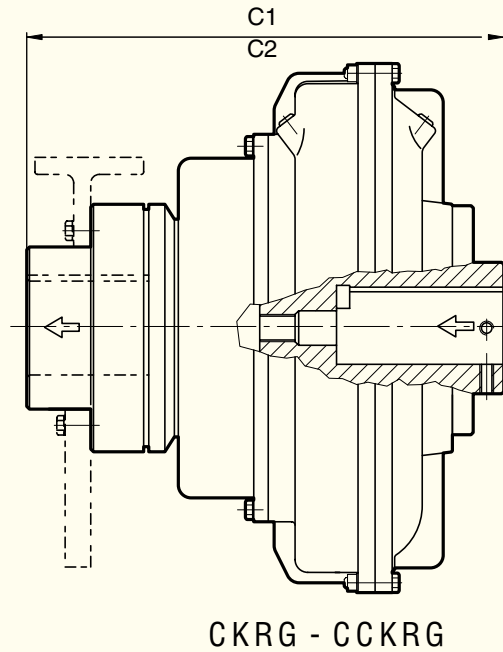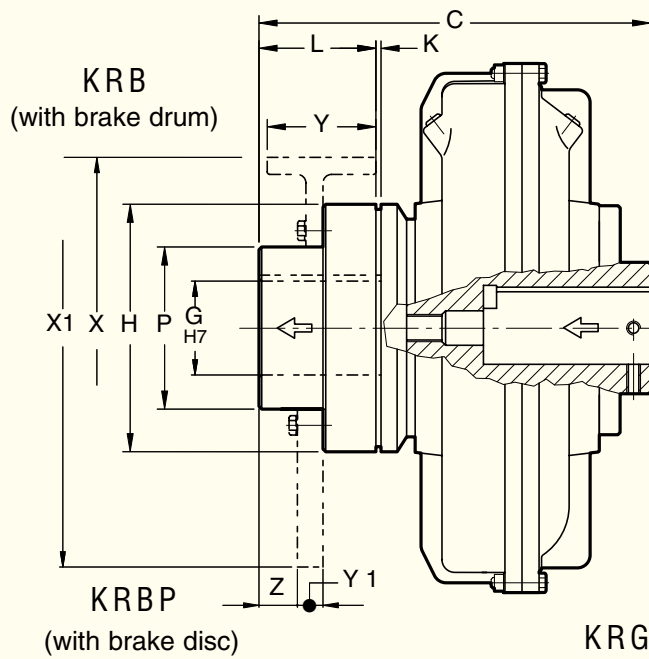

Dimensions mm.


Note: The arrows indicate input and output of the standard version.

| Size | C   | C <sub>1</sub> | C <sub>2</sub> | C <sub>3</sub> | C <sub>4</sub> | C <sub>5</sub> | G   | G <sub>1</sub> | H   | K | L   | L <sub>1</sub> | P   | Flex coupling | Brake drum<br>X x Y    | Brake disc<br>X <sub>1</sub> x Y <sub>1</sub> | Z  | Weight kg (less oil) |      |       |       |       |       |
|------|-----|----------------|----------------|----------------|----------------|----------------|-----|----------------|-----|---|-----|----------------|-----|---------------|------------------------|---|----|----------------------|------|-------|-------|-------|-------|
|      | KRG | CKRG           | CCKRG          | KRD            | CKRD           | CCKRD          | max |                |     |   |     |                |     |               |                        |   |    | KRG                  | CKRG | CCKRG | KRD   | CKRD  | CCKRD |
| 11   | 270 | 316            |                | 200            | 246            |                | 55  | 47.625         | 132 | 2 |     |                |     |               | 160 x 60<br>200 x 75   | on request                                    |    | 18                   | 20.5 |       | 13    | 15.5  |       |
| 12   |     | 337            |                |                | 267            |                |     |                |     |   | 80  |                |     |               |                        |   |    | 21.5                 | 24.5 |       | 16.7  | 19.7  |       |
| 13   | 303 | 363            |                | 230            | 290            |                | 70  | 53.975         | 170 |   |     |                |     |               | 200 x 75<br>250 x 95   | 400 x 30<br>450 x 30                          | 5  | 34                   | 37   |       | 26.3  | 29.3  |       |
| 15   | 364 | 432            | 480            | 251            | 319            | 367            | 80  | 60.325         |     |   |     |                |     | 100           | 250 x 95<br>315 x 118  | 400 x 30<br>450 x 30                          |    |                      |      |       | 26.3  | 29.3  |       |
| 17   |     |                |                |                |                |                |     |                |     |   |     |                |     | 120           |                        |   | 35 | 50.3                 | 54.3 | 62    | 40.4  | 44.4  | 52.1  |
| 19   | 387 | 467            | 547            | 288            | 368            | 448            | 90  | 73.025         | 250 | 3 | 110 | 108            | 135 | BT50          | 315 x 118<br>400 x 150 | 445 x 30<br>450 x 30                          | 15 | 77                   | 83   | 92    | 58.1  | 64.1  | 73.1  |
| 21   |     |                |                |                |                |                |     |                |     |   |     |                |     |               |                        |   |    | 84                   | 90   | 99    | 65.1  | 71.1  | 80.1  |
| 24   | 459 | 559            | 649            | 318            | 418            | 508            | 110 | 85.725         | 290 |   | 140 | 127            | 170 | BT60          | 400 x 150<br>500 x 190 | 560 x 30<br>630 x 30<br>710 x 30<br>795 x 30  | 45 | 129                  | 139  | 147   | 99.5  | 109.5 | 117.5 |
| 27   | 509 | 627            | 726            | 358            | 476            | 575            |     |                |     |   |     |                |     |               |                        |   |    | 147                  | 157  | 165   | 117.5 | 127.5 | 135.5 |
| 29   | 536 | 654            | 753            | 385            | 503            | 602            | 130 | 101.6          | 354 | 4 | 150 | 139.7          | 200 | BT80          | 500 x 190              | 710 x 30<br>795 x 30                          | 20 | 231                  | 249  | 268   | 181   | 189   | 218   |
| 34   | 630 | 761            | 860            | 472            | 603            | 702            | 160 | 139.7          | 425 | 5 | 180 | 152.4          | 240 | CT90          | 630 x 265              | 1000 x 30                                     | 50 | 284                  | 302  | 311   | 234   | 252   | 261   |
|      |     |                |                |                |                |                |     |                |     |   |     |                |     |               |                        |   |    | 471                  | 486  | 496   | 376   | 395   | 401   |

- G<sub>1</sub>, SHAFT WITH SQUARE KEYWAY AS PER USAS B17.1
- UPON REQUEST BORE G MACHINED - G<sub>1</sub> SPECIAL SHAFT
- WHEN ORDERING, SPECIFY SIZE, MODEL AND D DIAMETER, EXAMPLE: 17 CKRBP D. 73.025  
BRAKE DISC 450 x 30

DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

# SERIES 17 ÷ 34 KRG3 / CKRG3 / CCKRG3

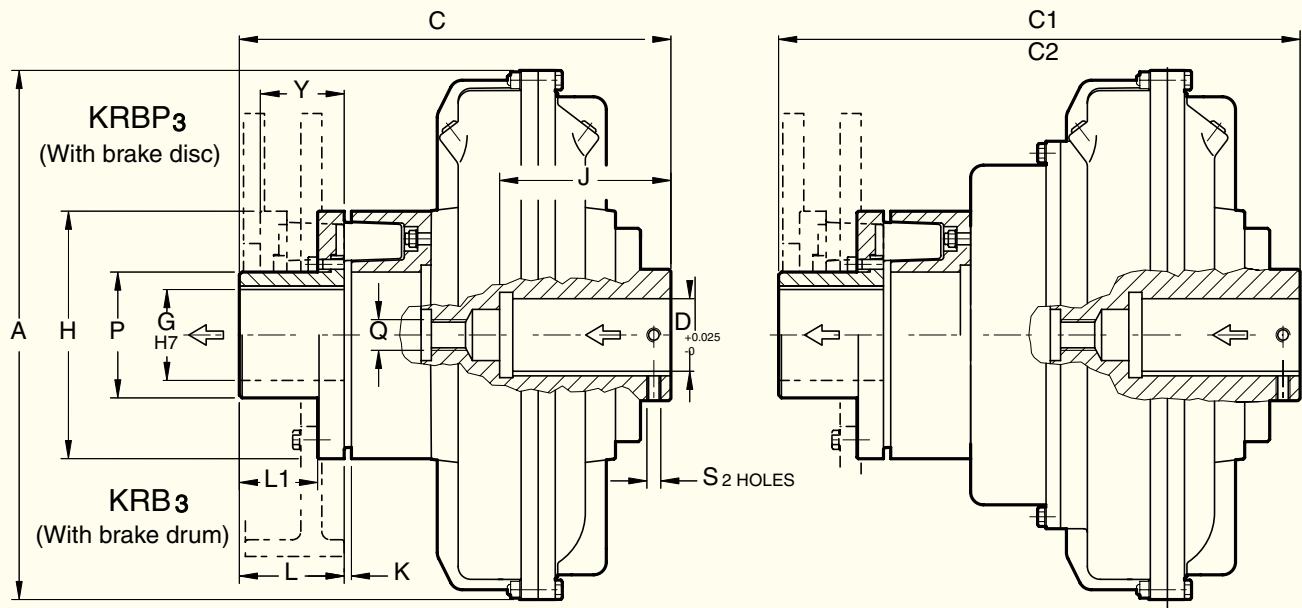

KRG3

CKRG3 - CCKRG3

The three pieces flexible coupling B3T, allows the removal of the elastic elements (rubber blocks), without removal of the electric motor; only with the ..KRB3 (with brake drum) coupling the electric motor must be moved by the value of 'Y'.  
 'Y' = axial displacement male part of the coupling B3T necessary for the removal of the elastic elements.

Note: The arrows  $\leftarrow$  indicate input and output of the standard version.

Dimensions


| Size | D        |       | J   | W      | V     | A    | G    |       |        | H   | K   | L   | L <sub>1</sub> | P   | Q                 | Y                 | Elastic coupling | Weight kg (less oil) |      |       |        |
|------|----------|-------|-----|--------|-------|------|------|-------|--------|-----|-----|-----|----------------|-----|-------------------|-------------------|------------------|----------------------|------|-------|--------|
|      | mm.      | inch. |     |        |       |      | KRG3 | CKRG3 | CCKRG3 |     |     |     |                |     |                   |                   |                  | max                  | KRG3 | CKRG3 | CCKRG3 |
| 17   | 85.725** | 3.375 | 194 | 22.225 | 92.3  | 520  | 443  | 523   | 603    | 80  | 240 | 110 | 82             | 130 | 1 1/4<br>7<br>UNC | 82                | B3T50            | 84                   | 90   | 99    |        |
|      | 73.025   | 2.875 | 178 | 19.05  | 81.4  |      |      |       |        |     |     |     |                |     |                   |                   |                  | 80                   | 240  | 110   | 82     |
| 19   | 85.725** | 3.375 | 194 | 22.225 | 92.3  | 565  | 443  | 523   | 603    | 80  | 240 | 110 | 82             | 130 | 1 1/4<br>7<br>UNC | 82                | B3T50            | 91                   | 97   | 106   |        |
|      | 73.025   | 2.875 | 178 | 19.05  | 81.4  |      |      |       |        |     |     |     |                |     |                   |                   |                  | 80                   | 240  | 110   | 82     |
| 21   | 98.425** | 3.875 | 216 | 25.4   | 104.3 | 620  | 483  | 583   | 673    | 110 | 290 | 140 | 78             | 150 | 1 1/4<br>7<br>UNC | 82                | B3T60            | 134                  | 144  | 152   |        |
|      | 85.725   | 3.375 | 210 | 22.225 | 95.3  |      |      |       |        |     |     |     |                |     |                   |                   |                  | 110                  | 290  | 140   | 78     |
| 24   | 98.425** | 3.875 | 216 | 25.4   | 104.3 | 714  | 483  | 583   | 673    | 110 | 290 | 140 | 78             | 150 | 1 1/4<br>7<br>UNC | 82                | B3T60            | 152                  | 162  | 176   |        |
|      | 85.725   | 3.375 | 210 | 22.225 | 95.3  |      |      |       |        |     |     |     |                |     |                   |                   |                  | 110                  | 290  | 140   | 78     |
| 27   | 120.65** | 4.750 | 216 | 31.75  | 128.8 | 780  | 591  | 709   | 808    | 130 | 354 | 4   | 150            | 112 | 180               | 1 3/4<br>5<br>UNC | 120              | B3T-80               | 250  | 268   | 287    |
| 29   | 133.35** | 5.250 | 241 | 31.75  | 142.7 | 860  | 618  | 736   | 835    |     |     |     |                |     |                   |                   |                  | 130                  | 354  | 4     | 150    |
| 34   | 150.8**  | 5.938 | 265 | 38.1   | 161.2 | 1000 | 721  | 852   | 951    | 130 | 395 | 5   | 170            | 119 | 205               | 1 3/4<br>5<br>UNC | 151              | B3T-90               | 488  | 496   | 506    |
|      |          |       |     |        |       | 1000 | 721  | 852   | 951    |     |     |     |                |     |                   |                   |                  | 130                  | 395  | 5     | 170    |

- MAX BORE WITH A KEYWAY AS PER USAS B17.1
- MAX BORE WITH REDUCED V DEPTH KEYWAY
- UPON REQUEST BORE G MACHINED
- WHEN ORDERING, SPECIFY SIZE, MODEL AND D DIAMETER, EXAMPLE: 15 KRM D. 60.325



Dim. D tolerance up to 50.8  $\begin{matrix} +0.025 \\ -0 \end{matrix}$  from 50.8 to 101.6  $\begin{matrix} +0.038 \\ -0 \end{matrix}$  from 101.6  $\begin{matrix} +0.05 \\ -0 \end{matrix}$

Dim. W tolerance up to 12.7  $\begin{matrix} +0.05 \\ -0 \end{matrix}$  from 15.875 to 25.4  $\begin{matrix} +0.076 \\ -0 \end{matrix}$  from 25.4 to 38.1  $\begin{matrix} +0.1 \\ -0 \end{matrix}$

DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

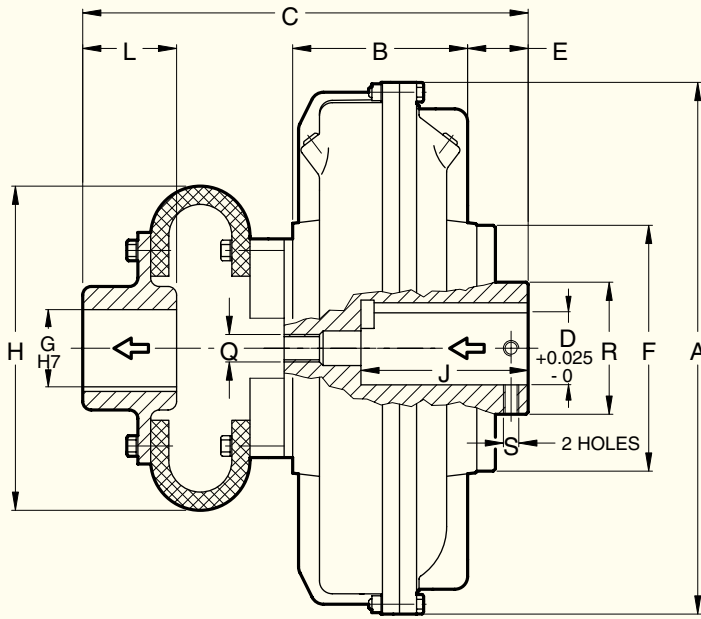

KRM

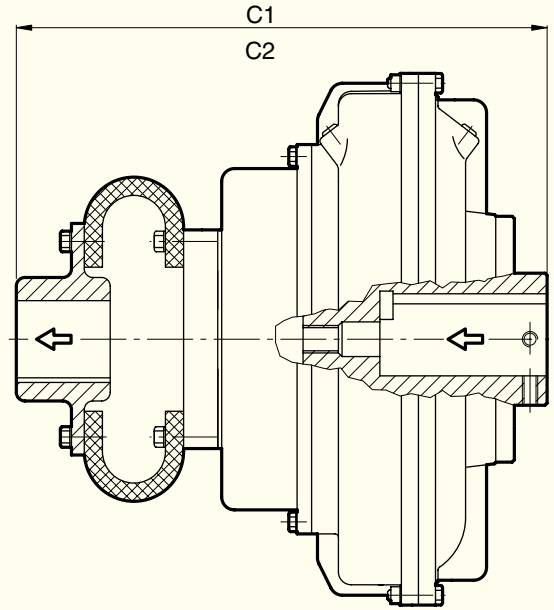

CKRM - CCKRM

Note: The arrows ← indicate input and output of the standard version.

Dimensions

| Size | D        |       | J    | W      | V     | A    | B   | C   | C <sub>1</sub> | C <sub>2</sub> | E  | F   | G   | H   | L   | Q                 | R   | S                 | Flex coupling | Weight kg (less oil) |                   |       |                 |
|------|----------|-------|------|--------|-------|------|-----|-----|----------------|----------------|----|-----|-----|-----|-----|-------------------|-----|-------------------|---------------|----------------------|-------------------|-------|-----------------|
|      | mm.      | inch. |      |        |       |      |     |     |                |                |    |     |     |     |     |                   |     |                   |               | KRM                  | CKRM              | CCKRM | KRM             |
| 9    | 41.275*  | 1.625 | 95.3 | 9.525  | 45.6  | 295  | 96  | 291 | -              |                | 46 | 128 |     |     |     |                   |     |                   |               |                      | 14.5              | -     | -               |
|      | 34.925   | 1.375 | 79.4 | 7.937  | 38.6  |      |     |     |                |                |    |     |     |     |     |                   |     |                   |               |                      |                   |       |                 |
| 11   | 47.625** | 1.875 | 111  | 12.7   | 50    | 325  | 107 | 300 | 346            | -              | 42 |     | 50  | 185 | 50  | 3/4<br>10<br>UNC  | 70  | 7/16<br>14<br>UNC | 53 F          |                      | 16.5              | 19    | -               |
|      | 41.275   | 1.625 | 95.3 | 9.525  | 45.6  |      |     |     |                |                |    |     |     |     |     |                   |     |                   |               |                      |                   |       |                 |
| 12   | 47.625** | 1.875 | 111  | 12.7   | 50    | 370  | 122 | 351 | 367            |                | 39 | 145 |     |     |     |                   |     |                   |               |                      | 20                | 23    |                 |
| 13   | 60.325** | 2.375 | 143  | 15.875 | 63    | 398  | 137 | 351 | 411            |                | 46 | 179 | 65  | 228 | 72  | 7/8<br>9<br>UNC   | 89  | 9/16<br>12<br>UNC | 55 F          |                      | 33                | 36    |                 |
|      | 53.975   | 2.125 | 127  | 12.7   | 59.7  |      |     |     |                |                |    |     |     |     |     |                   |     |                   |               |                      |                   |       |                 |
| 15   | 73.025** | 2.875 | 178  | 19.05  | 76    | 460  | 151 | 388 | 456            | 504            | 56 | 206 | 70  | 235 | 80  | 7/8<br>9<br>UNC   | 101 | 5/8<br>11<br>UNC  | 56 F          |                      | 48                | 52    | 59.7            |
|      | 60.325   | 2.375 | 143  | 15.875 | 67.3  |      |     |     |                |                |    |     |     |     |     |                   |     |                   |               |                      |                   |       |                 |
| 17   | 85.725** | 3.375 | 194  | 22.225 | 92.3  | 520  | 170 | 405 | 485            | 565            | 62 |     | 75  | 288 | 90  |                   |     |                   |               | 58 F                 | 67                | 73    | 82              |
|      | 73.025   | 2.875 | 178  | 19.05  | 81.4  |      |     |     |                |                |    |     |     |     |     |                   |     |                   |               |                      |                   |       |                 |
| 19   | 85.725** | 3.375 | 194  | 22.225 | 92.3  | 565  | 190 |     |                |                | 42 |     |     |     |     | 1 1/4<br>7<br>UNC |     | 3/4<br>10<br>UNC  |               | 65 F                 | 74                | 80    | 89              |
|      | 73.025   | 2.875 | 178  | 19.05  | 81.4  |      |     |     |                |                |    |     |     |     |     |                   |     |                   |               |                      |                   |       |                 |
| 21   | 98.425** | 3.875 | 216  | 25.4   | 104.3 | 620  | 205 |     |                |                | 71 |     |     |     |     |                   |     |                   |               | 65 F                 | 124               | 134   | 142             |
|      | 85.725   | 3.375 | 210  | 22.225 | 95.5  |      |     |     |                |                |    |     |     |     |     |                   |     |                   |               |                      |                   |       |                 |
| 24   | 98.425** | 3.875 | 216  | 25.4   | 104.3 | 714  | 229 |     |                |                | 47 |     |     |     |     |                   |     |                   |               | 65 F                 | 142               | 152   | 160             |
|      | 85.725   | 3.375 | 210  | 22.225 | 95.3  |      |     |     |                |                |    |     |     |     |     |                   |     |                   |               |                      |                   |       |                 |
| 27   | 120.65** | 4.750 | 216  | 31.75  | 129.8 | 780  | 278 | 550 | 668            | 767            | 41 | 315 | 100 | 462 | 122 |                   |     |                   |               | 66 F                 | 214               | 232   | 251             |
| 29   | 133.35** | 5.250 | 241  | 31.75  | 142.7 | 860  | 295 | 600 | 718            | 817            |    | 350 | 120 | 530 | 145 |                   |     |                   |               |                      | 1 3/4<br>5<br>UNC | 185   | 7/8<br>9<br>UNC |
| 34   | 150.8**  | 5.938 | 265  | 38.1   | 161.2 | 1000 | 368 | 683 | 814            | 913            | 54 | 400 | 140 | 630 | 165 | 1 3/4<br>5<br>UNC | 205 | 7/8<br>9<br>UNC   | 610 F         | 480                  | 497               | 507   |                 |


- MAX BORE WITH A KEYWAY AS PER USAS B17.1
- MAX BORE WITH REDUCED V DEPTH KEYWAY
- UPON REQUEST BORE G MACHINED
- WHEN ORDERING, SPECIFY SIZE, MODEL AND D DIAMETER, EXAMPLE: 15 KRM D. 60.325

Dim. D tolerance up to 50.8  $\begin{matrix} +0.025 \\ -0 \end{matrix}$  from 50.8 to 101.6  $\begin{matrix} +0.038 \\ -0 \end{matrix}$  from 101.6  $\begin{matrix} +0.05 \\ -0 \end{matrix}$


Dim. W tolerance up to 12.7  $\begin{matrix} +0.05 \\ -0 \end{matrix}$  from 15.875 to 25.4  $\begin{matrix} +0.076 \\ -0 \end{matrix}$  from 25.4 to 38.1  $\begin{matrix} +0.1 \\ -0 \end{matrix}$

DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

# SERIES 6 ÷ 24 KRA / CKRA / CCKRA

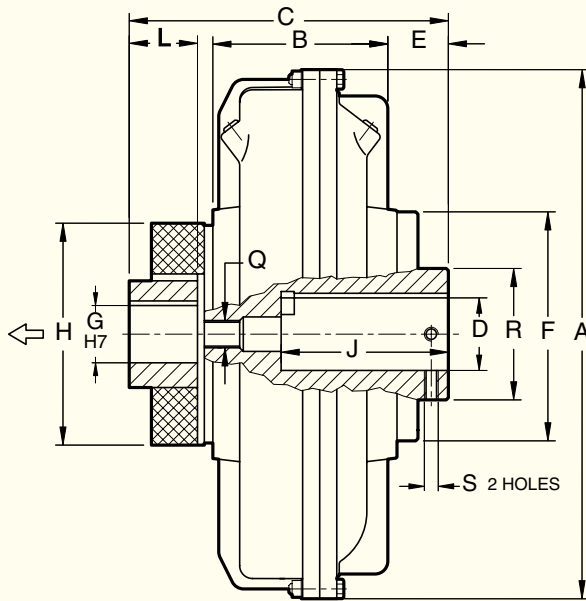

KRA

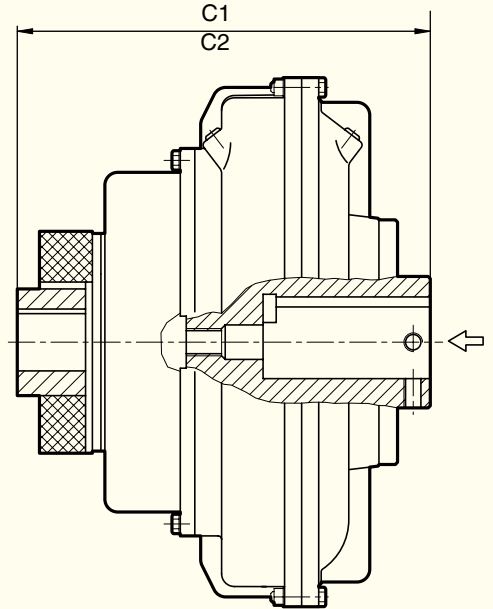

CKRA - CCKRA

Note: The arrows ← indicate input and output of the standard version.

Dimensions

| Size | D      |       | J    | W      | V     | A   | B   | C   | C <sub>1</sub> | C <sub>2</sub> | E  | F   | G    | H   | L  | Q                | R  | S                 | Flex coupling | Weight kg (less oil) |            |       |      |      |       |
|------|--------|-------|------|--------|-------|-----|-----|-----|----------------|----------------|----|-----|------|-----|----|------------------|----|-------------------|---------------|----------------------|------------|-------|------|------|-------|
|      | mm.    | inch. |      |        |       |     |     |     |                |                |    |     |      |     |    |                  |    |                   |               | KRA                  | CKRA       | CCKRA | KRA  | CKRA | CCKRA |
| 6    | 22.225 | .875  | 57.2 | 4.762  | 24.5  | 195 | 60  | 140 |                |                | 29 | 88  | 25.4 | 85  | 32 | -                | 33 | 1/4<br>20<br>UNC  | 2 A - 1 S     | 3.2                  |            |       |      |      |       |
|      | 15.875 | .625  | 47.6 | 7.937  | 18    |     |     |     |                |                |    |     |      |     |    |                  |    |                   |               |                      |            |       |      |      |       |
| 7    | 34.925 | 1.375 | 79.4 | 6.35   | 31.5  | 228 | 77  | 186 |                |                | 34 | 114 | 38   | 120 | 42 | 1/2<br>13<br>UNC | 50 | 5/16<br>18<br>UNC | 8 A - 1 S     | 6.7                  |            |       |      |      |       |
|      | 28.575 | 1.125 | 63.5 | 7.937  | 24.5  |     |     |     |                |                |    |     |      |     |    |                  |    |                   |               |                      |            |       |      |      |       |
| 8    | 34.925 | 1.375 | 79.4 | 6.35   | 31.5  | 256 | 91  | 191 |                |                | 30 |     |      |     |    |                  |    |                   |               | 7                    |            |       |      |      |       |
|      | 28.575 | 1.125 | 63.5 | 9.525  | 45.6  |     |     |     |                |                |    |     |      |     |    |                  |    |                   |               |                      |            |       |      |      |       |
| 9    | 41.275 | 1.625 | 95.3 | 9.525  | 45.6  | 295 | 96  | 232 |                |                | 46 |     |      |     |    |                  |    |                   |               | 16 A - 1 S           | 12.3       |       |      |      |       |
|      | 34.925 | 1.375 | 79.4 | 12.7   | 50    |     |     |     |                |                |    |     |      |     |    |                  |    |                   |               |                      |            |       |      |      |       |
| 11   | 47.625 | 1.875 | 111  | 12.7   | 50    | 325 | 107 | 241 | 287            |                | 42 | 128 | 48   | 151 | 50 | 3/4<br>10<br>UNC | 70 | 7/16<br>14<br>UNC | 25 A - 1 S    | 14.3                 | 16.8       |       |      |      |       |
|      | 41.275 | 1.625 | 95.3 | 9.525  | 45.6  |     |     |     |                |                |    |     |      |     |    |                  |    |                   |               |                      |            |       |      |      |       |
| 12   | 47.625 | 1.875 | 111  | 12.7   | 50    | 370 | 122 | 246 | 313            |                | 39 | 145 | 55   | 170 | 55 |                  |    |                   |               | 25 A - 1 S           | 19.5       | 22.5  |      |      |       |
|      | 60.325 | 2.375 | 143  | 15.875 | 63    |     |     |     |                |                |    |     |      |     |    |                  |    |                   |               |                      |            |       |      |      |       |
| 13   | 53.975 | 2.125 | 127  | 12.7   | 59.7  | 398 | 137 | 291 | 351            |                | 46 | 179 |      |     |    |                  |    | 7/8<br>9<br>UNC   | 89            | 9/16<br>12<br>UNC    | 50 A - 1 S | 30    | 33   |      |       |
|      | 73.025 | 2.875 | 178  | 19.05  | 76    |     |     |     |                |                |    |     |      |     |    |                  |    |                   |               |                      |            |       |      |      |       |
| 15   | 60.325 | 2.375 | 143  | 15.875 | 67.3  | 460 | 151 | 321 | 389            | 436            | 56 | 206 |      |     |    |                  |    |                   |               | 50 A - 1 S           | 42.9       | 46.9  | 54.6 |      |       |
|      | 53.975 | 2.125 | 127  | 12.7   | 59.7  |     |     |     |                |                |    |     |      |     |    |                  |    |                   |               |                      |            |       |      |      |       |
| 17   | 85.725 | 3.375 | 194  | 22.225 | 92.3  | 520 | 170 |     |                |                | 62 |     |      |     |    |                  |    |                   |               | 140 A - 1 S          | 63.2       | 69.2  | 78.2 |      |       |
|      | 73.025 | 2.875 | 178  | 19.05  | 81.4  |     |     |     |                |                |    |     |      |     |    |                  |    |                   |               |                      |            |       |      |      |       |
| 19   | 85.725 | 3.375 | 194  | 22.225 | 92.3  | 565 | 190 |     |                |                | 42 |     |      |     |    |                  |    |                   |               | 140 A - 1 S          | 70.2       | 76.2  | 85.2 |      |       |
|      | 73.025 | 2.875 | 178  | 19.05  | 81.4  |     |     |     |                |                |    |     |      |     |    |                  |    |                   |               |                      |            |       |      |      |       |
| 21   | 98.425 | 3.875 | 216  | 25.4   | 104.3 | 620 | 205 |     |                |                | 71 |     |      |     |    |                  |    |                   |               | 250 A - 1 S          | 118        | 128   | 136  |      |       |
|      | 85.725 | 3.375 | 210  | 22.225 | 95.5  |     |     |     |                |                |    |     |      |     |    |                  |    |                   |               |                      |            |       |      |      |       |
| 24   | 98.425 | 3.875 | 216  | 25.4   | 104.3 | 714 | 229 |     |                |                | 47 |     |      |     |    |                  |    |                   |               | 250 A - 1 S          | 136        | 146   | 154  |      |       |
|      | 85.725 | 3.375 | 210  | 22.225 | 95.5  |     |     |     |                |                |    |     |      |     |    |                  |    |                   |               |                      |            |       |      |      |       |

- MAX BORE WITH A KEYWAY AS PER USAS B17.1
- MAX BORE WITH REDUCED V DEPTH KEYWAY
- UPON REQUEST BORE G MACHINED
- WHEN ORDERING, SPECIFY SIZE, MODEL AND D DIAMETER, EXAMPLE: 15 KRM D, 60.325


Dim. D tolerance up to 50.8  $\begin{matrix} +0.025 \\ -0 \end{matrix}$  from 50.8 to 101.6  $\begin{matrix} +0.038 \\ -0 \end{matrix}$  Dim. W tolerance up to 12.7  $\begin{matrix} +0.05 \\ -0 \end{matrix}$  from 15.875 to 25.4  $\begin{matrix} +0.076 \\ -0 \end{matrix}$  from 25.4 to 38.1  $\begin{matrix} +0.1 \\ -0 \end{matrix}$

DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE


only for size "6"

EK

only for size "6"

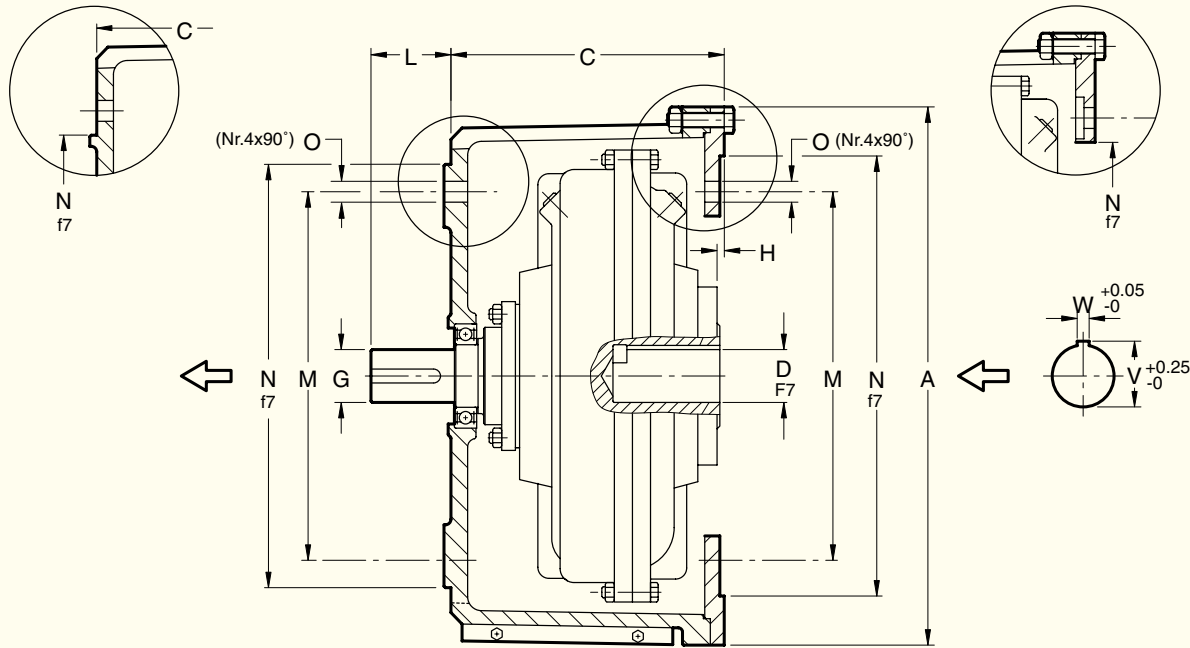

Note: The arrows ← indicate input and output of the standard version.

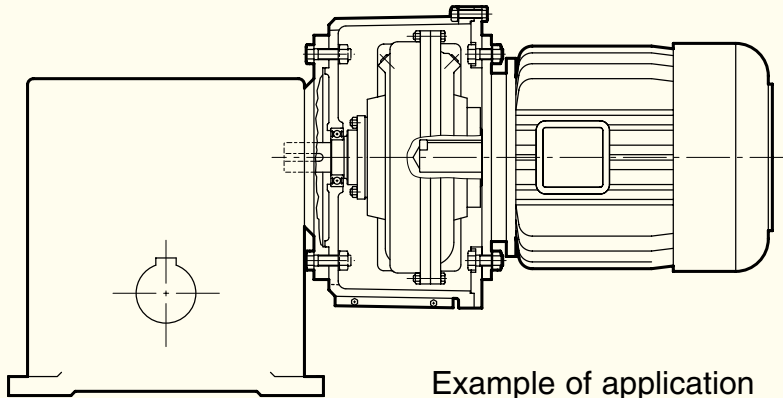

Example of application

Dimensions

| Size | D        |       | J    | W     | V    | G      | L    | A   | C     | H     | M     | N     | O    | Oil    | Electric Motor HP at 1800 RPM |             |
|------|----------|-------|------|-------|------|--------|------|-----|-------|-------|-------|-------|------|--------|-------------------------------|-------------|
|      | mm.      | inch  |      |       |      |        |      |     |       |       |       |       |      | max lt | size                          |             |
| 6    | •22.225  | .875  | 50.5 | 4.762 | 24.5 | 22.225 | 50.2 | 248 | 110   | 4.7   | 149.2 | 114.3 | 11   | 0.5    | 145TC                         | 1.5 - 2 (2) |
|      | 15.875   | .625  | 48   |       | 18   | 15.875 | 44.8 |     | 3.8   | 145TC |       |       |      |        | 1                             |             |
|      |          |       |      |       |      |        |      |     | 56C   | 0.75  |       |       |      |        |                               |             |
| 7    | 28.575   | 1.125 | 71   | 6.35  | 31.5 | 28.575 | 47   | 269 | 132   | -2.6  | 184.2 | 215.9 | 13.5 | 0.92   | 182TC                         | 3           |
|      |          |       |      |       |      |        |      |     |       |       |       |       |      |        | 184TC                         | 5           |
| 8    | 34.925   | 1.375 | 80   | 7.937 | 38.5 | 34.925 | 54   | 299 | 145.5 | 1.4   | 184.2 | 215.9 | 13.5 | 1.5    | 213TC                         | 7.5         |
|      |          |       |      |       |      |        |      |     |       |       |       |       |      |        | 215TC                         | 10          |
| 9    | 41.275   | 1.625 | 95.2 | 9.525 | 45.6 | 41.275 | 63   | 399 | 187   | 0     | 184.2 | 215.9 | 13.5 | 1.95   | 254TC                         | 15          |
|      |          |       |      |       |      |        |      |     |       |       |       |       |      |        |                               |             |
| 11   | ••47.625 | 1.875 | 111  | 12.7  | 50   | 47.625 | 73   | 399 | 187   | 0     | 184.2 | 215.9 | 13.5 | 2.75   | 284TC                         | 25          |
|      |          |       |      |       |      |        |      |     |       |       |       |       |      |        |                               |             |

• MAX BORE WITH A KEYWAY AS PER USAS B17.1

•• MAX BORE WITH REDUCED V DEPTH KEYWAY


G SHAFT SUPPLIED WITH SQUARE KEY USAS B 17.1

(2) WHEN FULL POWER IS ABSORBED USE HIGH DENSITY FIRE RESISTANT OIL


Dim. G tolerance up to 34.925 <sup>+0</sup>/<sub>-0.013</sub>  
from 41.925 to 47.625 <sup>+0</sup>/<sub>-0.025</sub>

DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

# SERIES 7 ÷ 34 KCM / CKCM / CCKCM

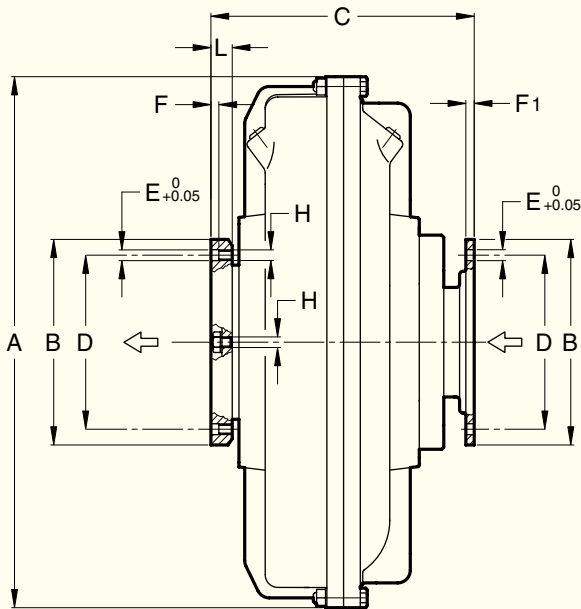

KCM

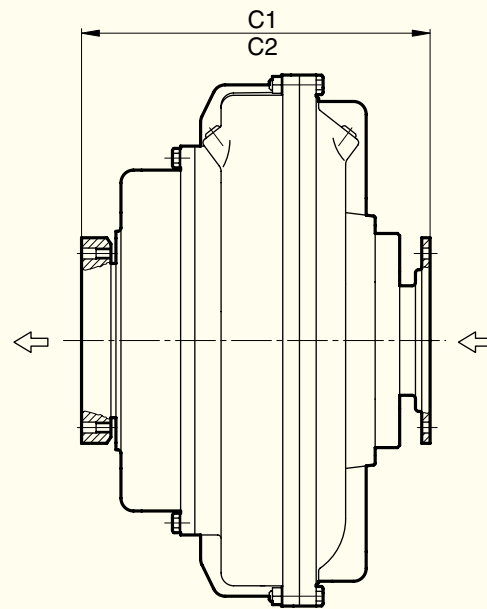

CKCM - CCKCM

Note: The arrows  $\leftarrow$  indicate input and output of the standard version.

THIS FLUID COUPLING MOUNTS ONE (1) HALF GEAR COUPLING ON EACH SIDE. THIS ALLOWS THE REMOVAL OF THE FLUID COUPLING WITHOUT MOVING THE MOTOR OR THE DRIVEN MACHINE

Dimensions




| Size | A    | B     | C     |      |       | D      | E   |       | F   | F <sub>1</sub>   | H                | L    | Weight kg (less oil) |      |       | Gear coupling size |     |    |    |
|------|------|-------|-------|------|-------|--------|-----|-------|-----|------------------|------------------|------|----------------------|------|-------|--------------------|-----|----|----|
|      |      |       | KCM   | CKCM | CCKCM |        | Nr. | Ø     |     |                  |                  |      | KCM                  | CKCM | CCKCM |                    |     |    |    |
| 7    | 228  | 116   | 140   | -    | -     | 95.25  | 6   | 6.4   | 7   | 6.5              | 1/4<br>28<br>UNF | 17   | 7.3                  | -    | -     | 1" S               |     |    |    |
| 8    | 256  |       | 145   |      |       |        |     |       |     |                  |                  |      | 8.1                  |      |       |                    | (3) |    |    |
| 9    | 295  | 152.5 | 177   | -    | -     | 122.22 | 8   | 9.57  | 21  | 3/8<br>24<br>UNF | 18.5             | 21   | 14                   | 18.5 | 24    | 1 1/2 S            |     |    |    |
| 11   | 325  |       | 186   |      |       |        |     |       |     |                  |                  |      | 232                  |      |       |                    | 21  | 28 | 31 |
| 12   | 370  |       | 198   |      |       |        |     |       |     |                  |                  |      | 265                  |      |       |                    | 21  | 28 | 31 |
| 13   | 398  | 208   | 283.5 |      |       |        |     |       |     |                  |                  |      |                      |      |       |                    | (3) |    |    |
| 15   | 460  | 213   | 250   | 329  | 377   | 177.8  | 10  | 12.75 | 9.5 | 10               | 1/2<br>20<br>UNF | 24.5 | 47.2                 | 51   | 59    | 2 1/2 S            |     |    |    |
| 17   | 520  |       | 250   | 332  | 412   |        |     |       |     |                  |                  |      | 66                   | 72   | 81    |                    |     |    |    |
| 19   | 565  |       | 250   | 332  | 412   |        |     |       |     |                  |                  |      | 75                   | 81   | 90    |                    |     |    |    |
| 21   | 620  |       | 320   | 422  | 512   |        |     |       |     |                  |                  |      | 108                  | 119  | 127   |                    |     |    |    |
| 24   | 714  | 129   | 139   | 147  |       |        |     |       |     |                  |                  |      |                      |      |       | (3)                |     |    |    |
| 27   | 780  | 280   | 408   | 526  | 625   | 241.3  | 8   | 19.05 | 22  | 28               | 3/4<br>10<br>UNC | 57   | 206                  | 229  | 239   | 3 1/2 E            |     |    |    |
| 29   | 860  |       | 437   | 555  | 654   |        |     |       |     |                  |                  |      | 255                  | 278  | 288   |                    |     |    |    |
| 34   | 1000 | 318   | 503   | 634  | 733   | 279.4  |     |       |     |                  |                  |      | 436                  | 444  | 454   | 4" E               |     |    |    |

(3) S = SHROUDED BOLTS

(4) S = EXPOSED BOLTS

WHEN ORDERING, SPECIFY SIZE AND MODEL EXAMPLE: 34 CKCM

DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

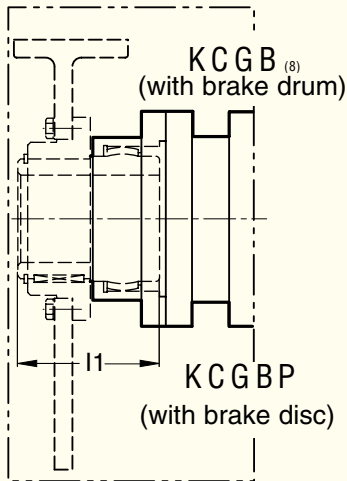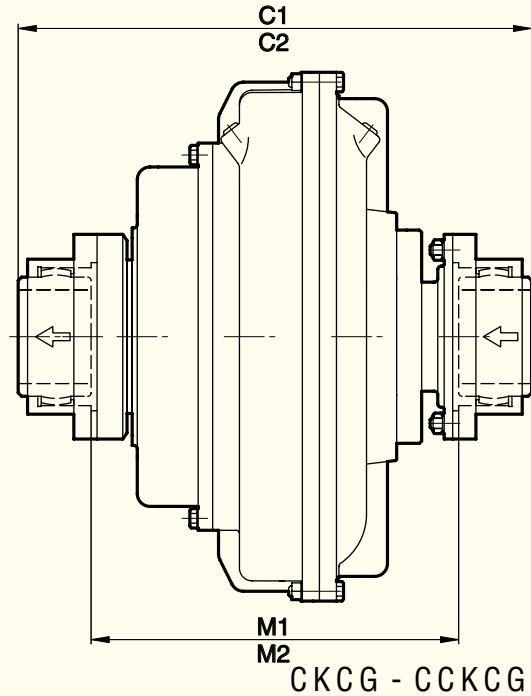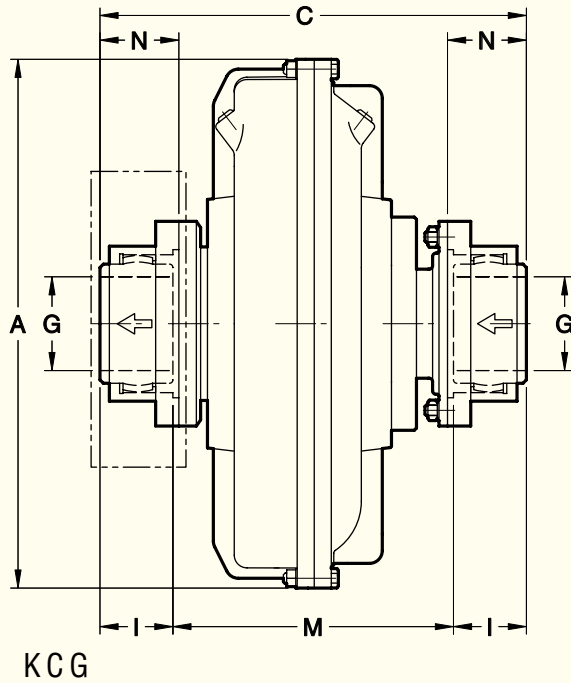

Brake drum or disc upon request  
<sup>(8)</sup> For ...KCGB dimension  
 M - M1 - M2 may vary  
 (contact Transfluid)

Note: The arrows ← indicate input and output of the standard version.

THIS FLUID COUPLING MOUNTS ONE (1) HALF GEAR COUPLING ON EACH SIDE.  
 THIS ALLOWS THE REMOVAL OF THE FLUID COUPLING WITHOUT MOVING THE  
 MOTOR OR THE DRIVEN MACHINE

→ Dimensions

| Size | A    |       | C     |       | C <sub>1</sub> |       | C <sub>2</sub> |  | G   |       | I     |     | I <sub>1</sub> |       | M   |      |       | M <sub>1</sub> |      |       | M <sub>2</sub> |       |          | N    |           | Gear coupling |  |
|------|------|-------|-------|-------|----------------|-------|----------------|--|-----|-------|-------|-----|----------------|-------|-----|------|-------|----------------|------|-------|----------------|-------|----------|------|-----------|---------------|--|
|      | KCG  | CKCG  | CKCG  | CCKCG | max            |       |                |  | KCG | CKCG  | CCKCG | KCG | CKCG           | CCKCG | KCG | CKCG | CCKCG | KCG            | CKCG | CCKCG | KCG            | CKCG  | CCKCG    | Size | Weight Kg |               |  |
| 7    | 228  | 229   |       |       | 50             | 43    | 101.6          |  | 143 |       |       |     |                |       | 143 |      |       |                |      |       |                |       | 44.5     | 1" S | 4         |               |  |
| 8    | 256  | 234   |       |       |                |       |                |  | 148 |       |       |     |                |       |     |      |       |                |      |       |                |       | (3)      |      |           |               |  |
| 9    | 295  | 278.6 |       |       |                |       |                |  | 180 |       |       |     |                |       |     |      |       |                |      |       |                |       |          |      |           |               |  |
| 11   | 325  | 287.6 | 333.6 |       | 65             | 49.3  | 114.3          |  | 189 | 235   |       |     |                |       |     |      |       |                |      |       |                | 50.8  | 1" 1/2 S | 8    |           |               |  |
| 12   | 370  | 299.6 | 366.6 |       |                |       |                |  | 201 | 268   |       |     |                |       |     |      |       |                |      |       |                |       | (3)      |      |           |               |  |
| 13   | 398  | 309.6 | 385.1 |       |                |       |                |  | 211 | 286.5 |       |     |                |       |     |      |       |                |      |       |                |       |          |      |           |               |  |
| 15   | 460  | 407   | 486   | 534   |                |       |                |  | 255 | 334   | 382   |     |                |       |     |      |       |                |      |       |                |       |          |      |           |               |  |
| 17   | 520  |       |       |       |                |       |                |  | 255 | 337   | 417   |     |                |       |     |      |       |                |      |       |                |       |          |      |           |               |  |
| 19   | 565  | 409   | 491   | 571   | 95             | 77    | 149.4          |  |     |       |       |     |                |       |     |      |       |                |      |       |                | 79.5  | 2" 1/2 S | 23.5 |           |               |  |
| 21   | 620  |       |       |       |                |       |                |  | 325 | 427   | 517   |     |                |       |     |      |       |                |      |       |                |       | (3)      |      |           |               |  |
| 24   | 714  | 479   | 581   | 671   |                |       |                |  |     |       |       |     |                |       |     |      |       |                |      |       |                |       |          |      |           |               |  |
| 27   | 780  | 627   | 745   | 844   |                |       |                |  | 414 | 532   | 631   |     |                |       |     |      |       |                |      |       |                |       |          |      |           |               |  |
| 29   | 860  | 656   | 774   | 873   | 134            | 106.5 | 184.2          |  | 443 | 561   | 660   |     |                |       |     |      |       |                |      |       |                | 109.5 | 3" 1/2 E | 56.6 |           |               |  |
| 34   | 1000 | 750   | 881   | 980   | 160            | 120.5 | 203.2          |  | 509 | 640   | 739   |     |                |       |     |      |       |                |      |       |                |       | (4)      | 4" E | 81.5      |               |  |


(3) S = SHROUDED BOLTS

(4) S = EXPOSED BOLTS

WHEN ORDERING, SPECIFY SIZE AND MODEL EXAMPLE: 34 CKCG

DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

# SERIES 9 ÷ 34 KDM / CKDM / CCKDM

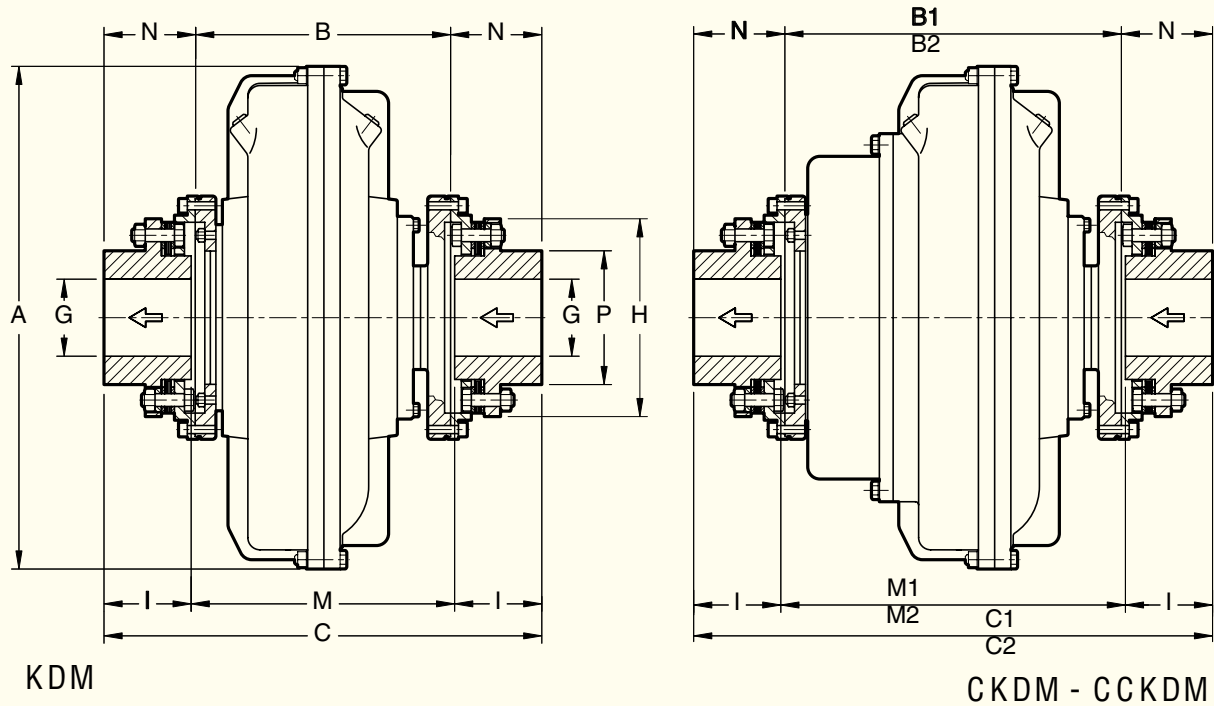

Note: The arrows  $\leftarrow$  indicate input and output of the standard version.


THIS FLUID COUPLING MOUNTS A HALF DISC COUPLING TO THE INPUT AND OUTPUT SIDE. THE DISC PACK REQUIRES MINIMAL MAINTENANCE AND ALLOWS THE REMOVAL OF THE FLUID COUPLING WITHOUT MOVING THE MOTOR OR DRIVEN MACHINE.

Dimensions

| Size | A    | B    | B <sub>1</sub> | B <sub>2</sub> | C    | C <sub>1</sub> | C <sub>2</sub> | G   | H    | I     | M   | M <sub>1</sub> | M <sub>2</sub> | N     | P    | Disc coupling | Weight kg (less oil) |       |       |
|------|------|------|----------------|----------------|------|----------------|----------------|-----|------|-------|-----|----------------|----------------|-------|------|---------------|----------------------|-------|-------|
|      | KDM  | CKDM | CCKDM          | KDM            | CKDM | CCKDM          | max            | KDM | CKDM | CCKDM | KDM | CKDM           | CCKDM          | KDM   | CKDM |               | CCKDM                |       |       |
| 9    | 295  | 177  | -              | -              | 278  | -              | -              | -   | -    | -     | 180 | -              | -              | -     | -    | -             | 20.5                 | -     | -     |
| 11   | 325  | 186  | 232            | -              | 289  | 336            | -              | 55  | 123  | 50    | 189 | 235            | -              | 51.5  | 76   | 1055          | 22.5                 | 25    | -     |
| 12   | 370  |      | 253            |                |      | 356            |                |     |      |       |     | 256            |                |       |      |               | 26                   | 29    |       |
| 13   | 398  | 216  | 276            | -              | 339  | 399            | -              | 65  | 147  | 60    | 219 | 279            | -              | 61.5  | 88   | 1065          | 41.3                 | 44.3  | -     |
| 15   | 460  | 246  | 314            | 362            | 391  | 459            | 507            | 75  | 166  | 70    | 251 | 319            | 367            | 72.5  | 104  | 1075          | 62.9                 | 66.9  | 74.6  |
| 17   | 520  | 269  | 349            | 429            | 444  | 524            | 604            | 90  | 192  | 85    | 274 | 354            | 434            | 87.5  | 122  | 1085          | 88.4                 | 94.4  | 103.4 |
| 19   | 565  |      |                |                |      |                |                |     |      |       |     |                |                |       |      |               | 95.4                 | 101.4 | 114.4 |
| 21   | 620  | 315  | 415            | 505            | 540  | 640            | 730            | 115 | 244  | 110   | 320 | 420            | 510            | 112.5 | 154  | 1110          | 161                  | 171   | 179   |
| 24   | 714  |      |                |                |      |                |                |     |      |       |     |                |                |       |      |               | 179                  | 189   | 197   |
| 27   | 780  | 358  | 476            | 575            | 644  | 762            | 861            | 135 | 300  | 140   | 364 | 482            | 581            | 143   | 196  | 1140          | 295                  | 313   | 332   |
| 29   | 860  | 387  | 505            | 604            | 673  | 792            | 890            |     |      |       | 393 | 511            | 610            |       |      |               | 348                  | 366   | 376   |
| 34   | 1000 | 442  | 573            | 672            | 768  | 899            | 998            | 165 | 340  | 160   | 448 | 579            | 678            | 163   | 228  | 1160          | 574                  | 562   | 572   |

- UPON REQUEST BORED G MACHINED
- WHEN ORDERING, SPECIFY SIZE AND MODEL, EXAMPLE: 27 CKDM

DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

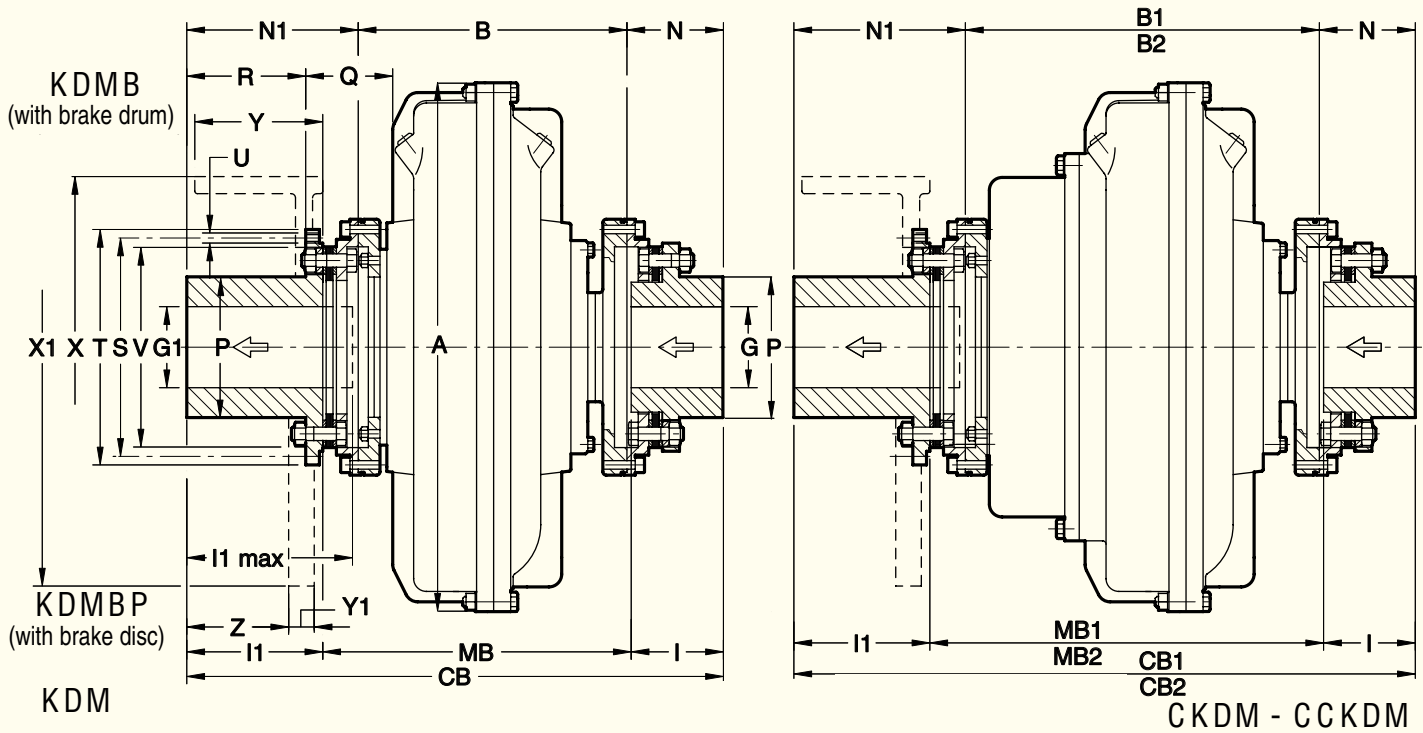

Note: The arrows ← indicate input and output of the standard version.

KDM / CKDM / CCKDM TYPE FLUID COUPLING, BUT MODIFIED TO INCORPORATE A BRAKE DRUM OR DISC

Dimensions

| Size | Brake drum<br>X x Y | Brake disc<br>X <sub>1</sub> x Y <sub>1</sub> | Weight kg (less oil) |       |       |
|------|---------------------|---|----------------------|-------|-------|
|      |                     |   | KDM                  | CKDM  | CCKDM |
| 12   | 200 x 75            | on request                                    | 27                   | 30    | -     |
| 13   |                     |   | 42.8                 | 45.8  |       |
| 15   | 250 x 95            | 450 x 30                                      | 64.4                 | 68.4  | 76.1  |
| 17   | 315 x 118           | 500 x 30                                      | 91.4                 | 97.4  | 106.4 |
| 19   | 400 x 150           | 560 x 30                                      | 98.4                 | 104.4 | 119.4 |
| 21   | 400 x 150           | 630 x 30                                      | 169                  | 179   | 187   |
| 24   | 500 x 190           | 710 x 30                                      | 187                  | 197   | 205   |
| 27   | 500 x 190           | 800 x 30                                      | 303                  | 321   | 340   |
| 29   |                     |   | 348                  | 366   | 376   |
| 34   | on request          | 800 x 30<br>1000 x 30                         | 554                  | 569   | 579   |


Dimensions

| Size | A    | B    | B <sub>1</sub> | B <sub>2</sub> | CB    | CB <sub>1</sub> | CB <sub>2</sub> | G   | G <sub>1</sub> | I   | I <sub>1</sub> |       | MB    | MB <sub>1</sub> | MB <sub>2</sub> | N     | N <sub>1</sub> | P   | Q   | R    | S   | T   | U   |     | V   | Z    | Disc coupling |
|------|------|------|----------------|----------------|-------|-----------------|-----------------|-----|----------------|-----|----------------|-------|-------|-----------------|-----------------|-------|----------------|-----|-----|------|-----|-----|-----|-----|-----|------|---------------|
|      | KDM  | CKDM | CCKDM          | KDM            | CKDM  | CCKDM           | max             | max |                | std | max            | KDM   | CKDM  | CCKDM           | std             |       |                |     |     | ±0.1 | f7  | Nr. | Ø   |     |     |      |               |
| 12   | 370  | 186  | 253            | -              | 336.5 | 403.5           | -               | 55  | 60             | 50  | 80             | 206.5 | 273.5 | -               | 51.5            | 99    | 76             | 67  | 69  | 128  | 142 | 8   | M8  | 114 | -   | 1055 |               |
| 13   | 398  | 216  | 276            |                | 440.5 | 500.5           |                 | 65  | 70             | 60  | 140            | 240.5 | 300.5 |                 | 61.5            | 163   | 88             | 78  | 129 | 155  | 170 |     | M8  | 140 | -   | 1065 |               |
| 15   | 460  | 246  | 314            | 362            | 495.5 | 563.5           | 611.5           | 75  | 80             | 70  | 150            | 275.5 | 343.5 | 391.5           | 72.5            | 177   | 104            | 98  | 134 | 175  | 192 |     | M10 | 157 | 109 | 1075 |               |
| 17   | 520  |      |                |                | 548.5 | 628.5           | 708.5           | 90  | 95             | 85  |                | 303.5 | 383.5 | 463.5           | 87.5            | 192   | 122            | 107 | 143 | 204  | 224 |     | M10 | 185 | 118 | 1085 |               |
| 19   | 565  | 269  | 349            | 429            | 548.5 | 628.5           | 708.5           | 90  | 95             | 85  |                | 303.5 | 383.5 | 463.5           | 87.5            | 192   | 122            | 107 | 143 | 204  | 224 |     | M10 | 185 | 118 | 1085 |               |
| 21   | 620  |      |                |                | 628.5 | 728.5           | 818.5           | 115 | 120            | 110 |                | 358.5 | 458.5 | 548.5           | 112.5           | 201   | 154            | 133 | 137 | 256  | 276 |     | M12 | 234 | 112 | 1110 |               |
| 24   | 714  |      |                |                | 628.5 | 728.5           | 818.5           | 115 | 120            | 110 |                | 358.5 | 458.5 | 548.5           | 112.5           | 201   | 154            | 133 | 137 | 256  | 276 |     | M12 | 234 | 112 | 1110 |               |
| 27   | 780  | 358  | 476            | 575            | 731.5 | 849.5           | 948.5           | 135 | 145            | 140 |                | 411.5 | 529.5 | 628.5           | 143             | 230.5 | 196            | 107 | 155 | 315  | 338 |     | M14 | 286 | 133 | 1140 |               |
| 29   | 860  | 987  | 505            | 604            | 760.5 | 878.5           | 977.5           | 135 | 145            | 140 |                | 440.5 | 558.5 | 657.5           | 143             | 230.5 | 196            | 107 | 155 | 315  | 338 |     | M14 | 286 | 133 | 1140 |               |
| 34   | 1000 | 442  | 573            | 672            | 845.5 | 976.5           | 1075.5          | 165 | 175            | 160 |                | 505.5 | 636.5 | 735.5           | 163             | 240.5 | 228            | 124 | 152 | 356  | 382 |     | M16 | 325 | 130 | 1160 |               |

- UPON REQUEST BORES G AND G<sub>1</sub> MACHINED
- WHEN ORDERING, SPECIFY SIZE, MODEL AND D DIAMETER, EXAMPLE: 17 KDMB BRAKE DRUM 400 x 150

DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

# SERIES 6 ÷ 19 KSD-QD / CKSD-QD / CCKSD-QD

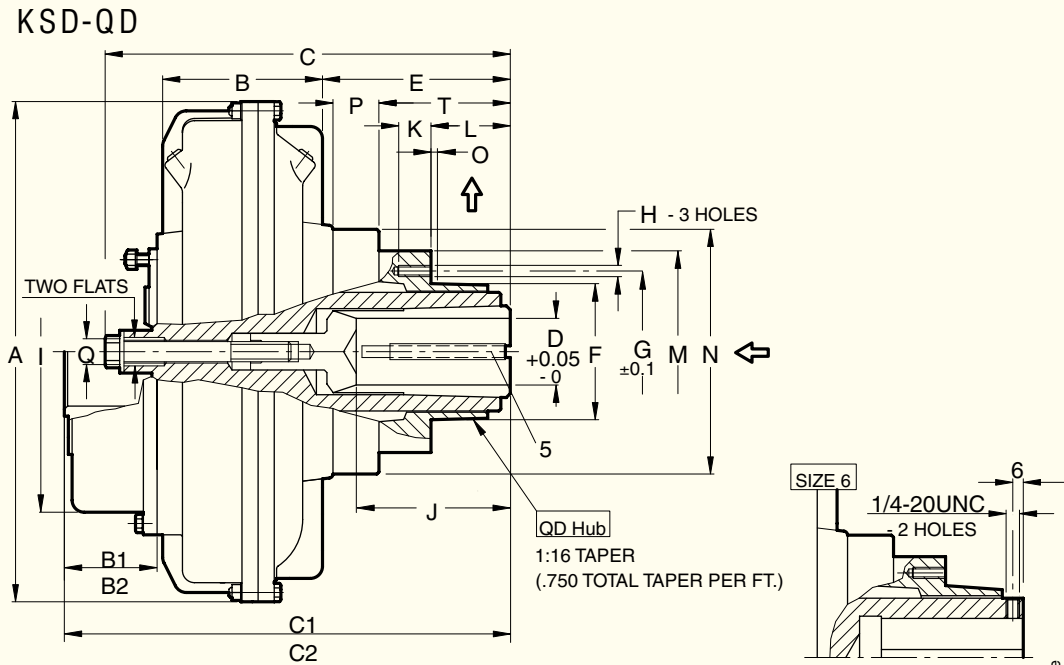

Note: The arrows ⇐ indicate input and output of the standard version.


| Size | Weight Kg (less oil) |         |          |
|------|----------------------|---------|----------|
|      | KSD-QD               | CKSD-QD | CCKSD-QD |
| 6    | 3.4                  | -       | -        |
| 7    | 6                    | -       | -        |
| 8    | 6.7                  | -       | -        |
| 9    | 13                   | -       | -        |
| 11   | 15.5                 | 18      | -        |
| 12   | 23                   | 26      | -        |
| 13   | 33.5                 | 36.5    | -        |
| 15   | 48                   | 52      | 59.5     |
| 17   | 70                   | 76      | 85       |
| 19   | 78                   | 84      | 93       |

⇐ Dimensions

| Size | D       |       | J     | A   | B   | B <sub>1</sub> | B <sub>2</sub> | C     | C <sub>1</sub> | C <sub>2</sub> | E     | F        | G      | H | I                 | K   | L  | M    | N   | O   | P    | Q                 | T     | QD hub size |      |
|------|---------|-------|-------|-----|-----|----------------|----------------|-------|----------------|----------------|-------|----------|--------|---|-------------------|-----|----|------|-----|-----|------|-------------------|-------|-------------|------|
|      | mm.     | Inch  |       |     |     |                |                |       |                |                |       |          |        |   |                   |     |    |      |     |     |      |                   |       |             |      |
| 6    | 22.225* | .875  | 50.8  | 195 | 60  |                |                | 140   |                |                | 62    | 47.5285  | 57.2   |   |                   |     | 33 | 68   | 88  |     | 14.5 | -                 | 44.5  | SH          |      |
|      | 15.875  | .625  |       |     |     |                |                |       |                |                |       |          |        |   |                   |     |    |      |     |     |      |                   |       |             | 47.6 |
| 7    | 34.925* | 1.375 | 61    | 228 | 77  | -              |                | 180   | -              |                | 70.3  | 55.5625  | 68.3   |   |                   | 15  |    | 29.3 | 79  | 114 | 15   | 1/2<br>13<br>UNC  | 49.3  | SDS         |      |
|      | 28.575  | 1.125 |       |     |     |                |                |       |                |                |       |          |        |   |                   |     |    |      |     |     |      |                   |       |             |      |
| 8    | 34.925* | 1.375 | 84    | 256 | 91  | -              |                | 186   | -              |                | 66.3  |          |        |   |                   | 18  |    | 36.8 | 98  | 128 | 3    | 26.5              |       | 63          | SK   |
|      | 28.575  | 1.125 |       |     |     |                |                |       |                |                |       |          |        |   |                   |     |    |      |     |     |      |                   |       |             |      |
| 9    | 41.275* | 1.625 | 101.6 | 295 | 96  | -              |                | 249   | -              |                | 101   | 71.4375  | 84.1   | 3 | 5/16<br>18<br>UNC |     |    | 116  | 140 |     | 20   |                   | 70    | SF          |      |
|      | 34.925  | 1.375 |       |     |     |                |                |       |                |                |       |          |        |   |                   |     |    |      |     |     |      |                   |       |             |      |
| 11   | 47.625* | 1.875 | 108   | 325 | 107 | 73.5           |                | 259   | 289.5          |                | 98    | 79.375   | 98.4   |   | 195               | 21  |    | 47.5 |     | 155 | 23.5 | 3/4<br>10<br>UNC  | 101   | E           |      |
|      | 41.275  | 1.625 |       |     |     |                |                |       |                |                |       |          |        |   |                   |     |    |      |     |     |      |                   |       |             |      |
| 12   | 53.975* | 2.125 | 171.5 | 370 | 122 | 80             |                | 293.5 | 331.5          |                | 129.5 |          | 127    |   | 224               | 27  |    | 152  |     | 178 | 27.5 |                   | 132.5 |             |      |
|      | 47.625  | 1.875 |       |     |     |                |                |       |                |                |       |          |        |   |                   |     |    |      |     |     |      |                   |       |             |      |
| 13   | 60.325* | 2.375 | 143   | 398 | 137 |                |                | 353   | 380            |                | 163   |          |        |   |                   |     |    | 71.4 |     | 178 | 27.5 |                   | 132.5 |             |      |
|      | 53.975  | 2.125 |       |     |     |                |                |       |                |                |       |          |        |   |                   |     |    |      |     |     |      |                   |       |             |      |
| 15   | 47.625* | 1.875 | 171.5 | 460 | 151 | 92             | 140            | 396   | 424            | 472            | 181   | 112.7125 | 142.9  | 3 | 9/16<br>12<br>UNC | 259 | 30 | 86   | 168 | 204 | 35   | 7/8<br>9<br>UNC   | 138   | F           |      |
|      | 73.025  | 2.875 |       |     |     |                |                |       |                |                |       |          |        |   |                   |     |    |      |     |     |      |                   |       |             |      |
| 17   | 85.725* | 3.375 | 171.5 | 520 | 170 | 101            | 181            | 487   | 516            | 596            | 245   | 130.7694 | 158.75 | 3 | 5/8<br>11<br>UNC  | 337 | 35 | 110  | 184 | 228 | 45   | 1-1/4<br>7<br>UNC | 170   | J           |      |
|      | 73.025  | 2.875 |       |     |     |                |                |       |                |                |       |          |        |   |                   |     |    |      |     |     |      |                   |       |             |      |
| 19   | 85.725* | 3.375 | 171.5 | 565 | 190 |                |                | 487   | 516            | 596            | 225   |          |        |   |                   |     |    |      |     |     | 45   |                   |       |             |      |
|      | 73.025  | 2.875 |       |     |     |                |                |       |                |                |       |          |        |   |                   |     |    |      |     |     |      |                   |       |             |      |

- MAX BORE WITH A KEYWAY AS PER USAS B 17-1
- (5) STEP KEY INCLUDED AS PER USAS B 17-1
- WHEN ORDERING, SPECIFY SIZE, MODEL AND D DIAMETER, EXAMPLE: 11 KSD-QD D.34.925

DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

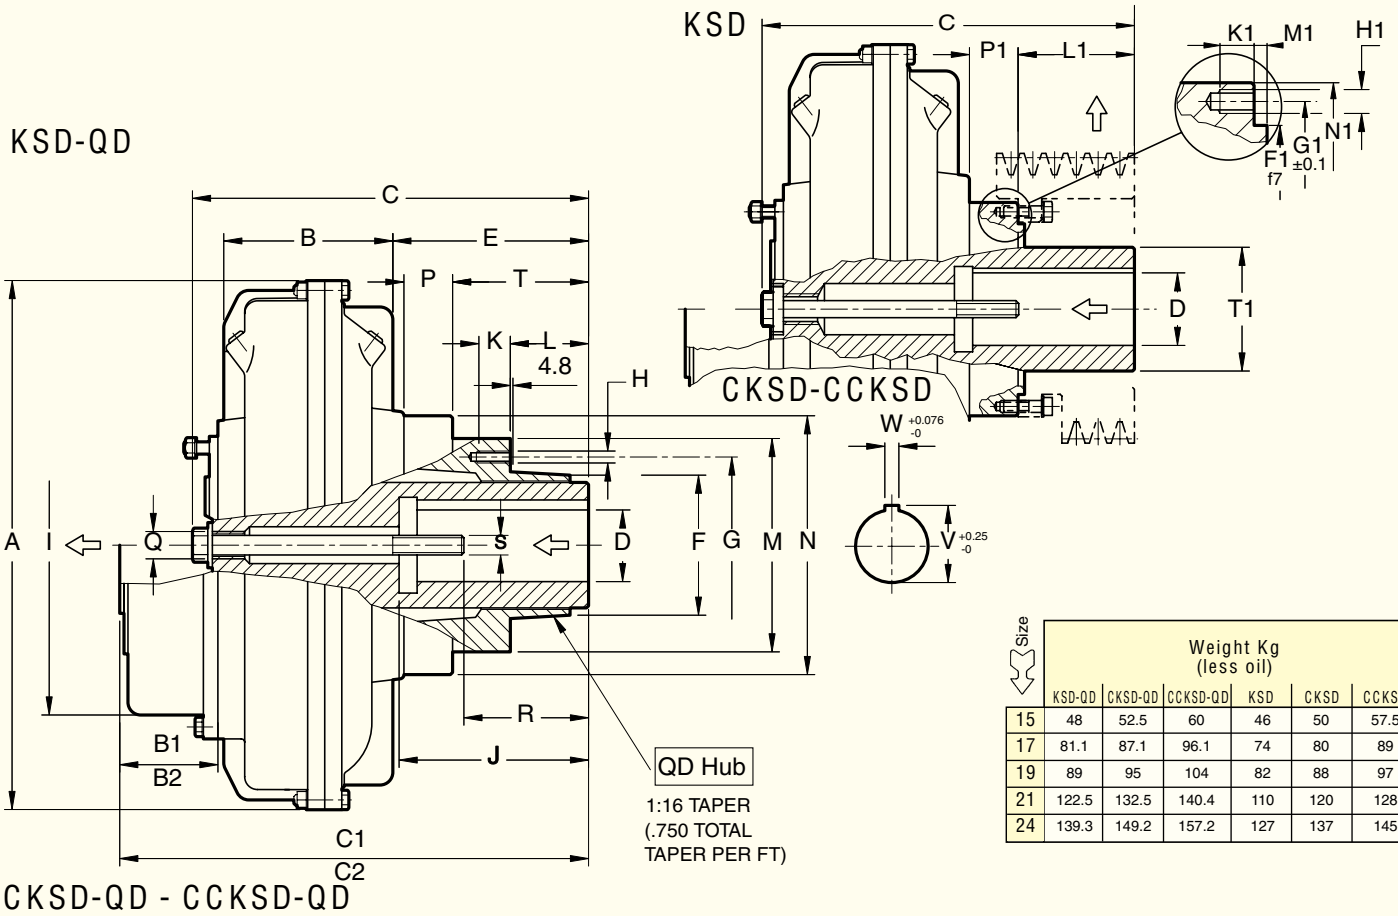

| Size | Weight Kg (less oil) |         |          |     |      |       |
|------|----------------------|---------|----------|-----|------|-------|
|      | KSD-QD               | CKSD-QD | CCKSD-QD | KSD | CKSD | CCKSD |
| 15   | 48                   | 52.5    | 60       | 46  | 50   | 57.5  |
| 17   | 81.1                 | 87.1    | 96.1     | 74  | 80   | 89    |
| 19   | 89                   | 95      | 104      | 82  | 88   | 97    |
| 21   | 122.5                | 132.5   | 140.4    | 110 | 120  | 128   |
| 24   | 139.3                | 149.2   | 157.2    | 127 | 137  | 145   |

Dimensions

| Size | D       |       | J     | W      | V     | A   | B   | B <sub>1</sub> | B <sub>2</sub> | C       | C <sub>1</sub> | C <sub>2</sub> | E   | F        | G      | H   | I                 | K   | L  | M   | N   | P   | Q  | R                 | S   | T                | QD hub size |    |
|------|---------|-------|-------|--------|-------|-----|-----|----------------|----------------|---------|----------------|----------------|-----|----------|--------|-----|-------------------|-----|----|-----|-----|-----|----|-------------------|-----|------------------|-------------|----|
|      | mm.     | Inch  |       |        |       |     | KSD | CKS..          | CCK..          | max KSD | CK..           | CCK..          |     |          |        | Nr. | Ø                 |     |    |     |     |     |    |                   |     |                  |             |    |
| 15   | 73.025* | 2.875 | 177.8 | 19.05  | 76    | 460 | 151 | 92             | 140            | 384     | 438            | 486            | 195 | 112.7125 | 142.9  | 3   | 9/16<br>12<br>UNC | 259 | 30 | 100 | 168 | 204 | 49 | 7/8<br>9<br>UNC   | 136 | 3/4<br>10<br>UNC | 152         | F  |
|      | 60.325  | 2.375 | 143   | 15.875 | 67.3  |     |     |                |                |         |                |                |     |          |        |     |                   |     |    |     |     |     |    |                   | 99  |                  |             |    |
| 17   | 85.725* | 3.375 | 210   | 22.225 | 92.3  | 520 | 170 | 101            | 181            | 455     | 516            | 596            | 245 | 130.7694 | 158.75 | 3   | 5/8<br>11<br>UNC  | 337 | 35 | 110 | 210 | 228 | 70 | 127               | 160 | 214.6            | J           |    |
|      | 73.025  | 2.875 | 177.8 | 19.05  | 81.4  |     |     |                |                |         |                |                |     |          |        |     |                   |     |    |     |     |     |    |                   |     |                  |             | 99 |
| 19   | 85.725* | 3.375 | 210   | 22.225 | 92.3  | 565 | 190 | 115            | 205            | 545     | 620            | 710            | 300 | 165.1    | 200    | 4   | 3/4<br>10<br>UNC  | 400 | 40 | 180 | 229 | 264 | 55 | 1-1/4<br>7<br>UNC | 167 | 7/8<br>9<br>UNC  | 280         | M  |
|      | 73.025  | 2.875 | 177.8 | 19.05  | 81.4  |     |     |                |                |         |                |                |     |          |        |     |                   |     |    |     |     |     |    |                   | 99  |                  |             |    |
| 21   | 98.425* | 3.875 | 216   | 25.4   | 109.6 | 620 | 205 | 115            | 205            | 545     | 620            | 710            | 300 | 165.1    | 200    | 4   | 3/4<br>10<br>UNC  | 400 | 40 | 180 | 229 | 264 | 55 | 1-1/4<br>7<br>UNC | 165 | 7/8<br>9<br>UNC  | 240         | M  |
|      | 85.725  | 3.375 | 210   | 22.225 | 95.5  |     |     |                |                |         |                |                |     |          |        |     |                   |     |    |     |     |     |    |                   | 99  |                  |             |    |
| 24   | 98.425* | 3.875 | 216   | 25.4   | 109.6 | 714 | 229 | 115            | 205            | 545     | 620            | 710            | 276 | 165.1    | 200    | 4   | 3/4<br>10<br>UNC  | 400 | 40 | 180 | 229 | 264 | 36 | 1-1/4<br>7<br>UNC | 167 | 7/8<br>9<br>UNC  | 280         | M  |
|      | 85.725  | 3.375 | 210   | 22.225 | 95.5  |     |     |                |                |         |                |                |     |          |        |     |                   |     |    |     |     |     |    |                   | 99  |                  |             |    |

- MAX BORE WITH A KEYWAY AS PER USAS B 17-1
- MAX BORE WITH REDUCED V DEPTH KEY WAY
- WHEN ORDERING, SPECIFY SIZE, MODEL AND D DIAMETER, EXAMPLE: 15 KSD D. 73.025 OR 15KSD-QD D.73.025

Dim. D tolerance up to 50.8  $\begin{matrix} +0.025 \\ -0 \end{matrix}$   
 from 50.8 to 101.6  $\begin{matrix} +0.038 \\ -0 \end{matrix}$   
 from 101.6 to 152.4  $\begin{matrix} +0.05 \\ -0 \end{matrix}$

Dim. W tolerance up to 12.7  $\begin{matrix} +0.05 \\ -0 \end{matrix}$   
 from 15.875 to 25.4  $\begin{matrix} +0.076 \\ -0 \end{matrix}$   
 from 25.4 to 38.1  $\begin{matrix} +0.1 \\ -0 \end{matrix}$


Dimensions (Only for ...KSD)

| Size | F <sub>1</sub>          | G <sub>1</sub> | H <sub>1</sub> | K <sub>1</sub> | L <sub>1</sub> | M <sub>1</sub> | N <sub>1</sub> | P <sub>1</sub> | T <sub>1</sub> |
|------|-------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
|      | Nr.                     |                | Ø              |                |                |                |                |                |                |
| 15   | 150                     | 178            | 12             | M10            | 17             | 159            | 206            | 28             | 100            |
| 17   | 180                     | 200            |                |                |                |                |                |                |                |
| 19   |                         |                |                |                |                | 225            | 45             | 132            |                |
| 21   | 200                     | 228            | 8              | M14            | 20             | 230            | 250            | 57             | 145            |
|      |                         |                |                |                |                |                |                |                |                |
| 24   |                         |                |                |                |                | 190            | 46             |                |                |
| 27   | CONSULT OUR ENGINEERING |                |                |                |                |                |                |                |                |


DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

# SERIES D34 KBM / KDM

FLUID COUPLING WITH DOUBLE CIRCUIT, FITTED WITH MAIN JOURNALS AND INPUT AND OUTPUT SHAFTS

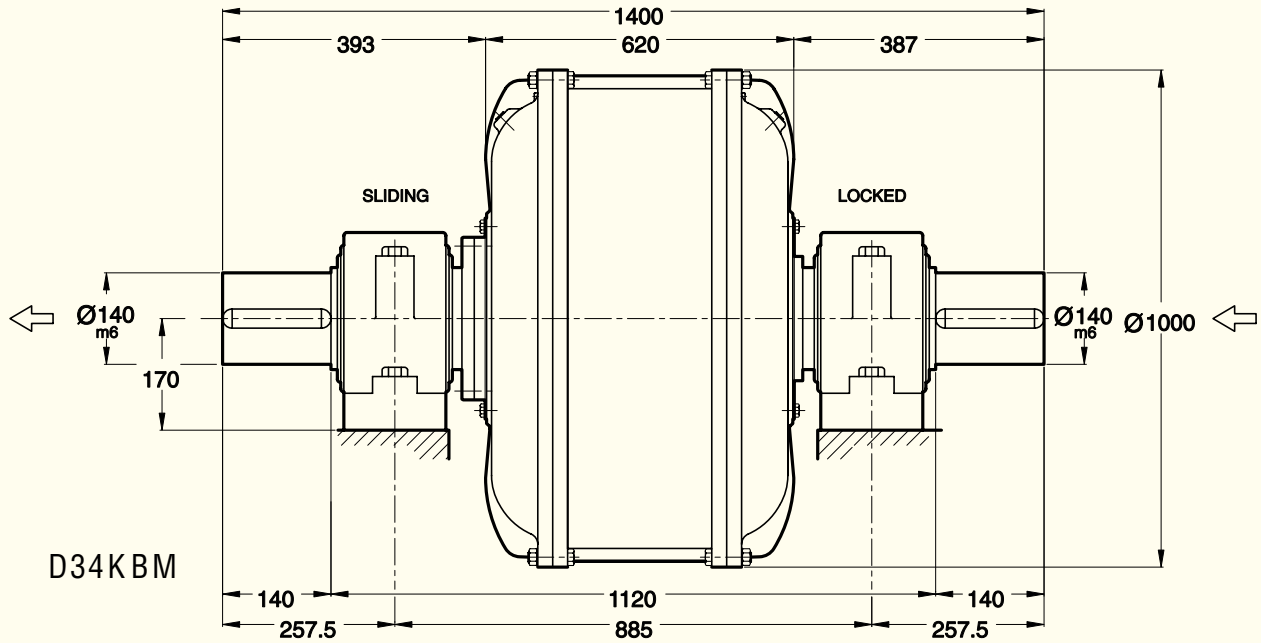

THIS FLUID COUPLING MOUNTS A HALF DISC COUPLING TO THE INPUT AND OUTPUT SIDE. THE DISC PACK REQUIRES MINIMAL MAINTENANCE AND ALLOWS THE REMOVAL OF THE FLUID COUPLING WITHOUT MOVING THE MOTOR OR DRIVEN MACHINE.

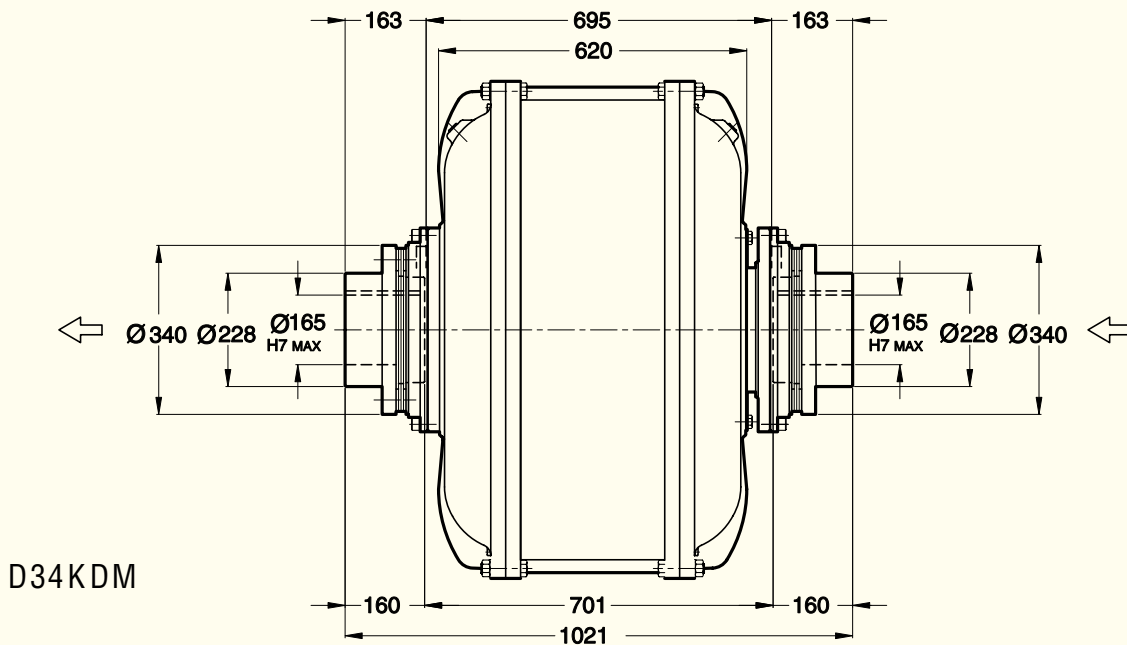

| SERIES | WEIGHT Kg<br>(without oil) | OIL<br>max. lt |
|--------|----------------------------|----------------|
| D34KBM | 810                        | 162            |
| D34KDM | 880                        |                |

Note: The arrows ⇐ indicate input and output of the standard version.

DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

# RECOMMENDED OIL AND QUANTITY SAFETY DEVICES

## OIL FILL

Transfluid fluid couplings are generally delivered without oil. Therefore, it is necessary to follow the filling procedures listed below :

- 1 - For a fluid coupling mounted on a horizontal shaft, turn the coupling body until the appropriate fill mark is at the vertical (12 o'clock) position. These marks are raised "X", "1", "2", "3", "4" that are part of the cast aluminum housing of the coupling Fig. 5. This will place the two oil fill plugs (one on each side of the coupling) near the 2 o'clock position.
- 2 - Remove both plugs, if access permits, and fill until oil overflows from the fill hole(s). Install both plugs and rotate the coupling slowly by hand to insure no air pockets are trapped in the fill area. Reposition the coupling as before and add more oil if needed. (NOTE: Removing both plugs allows one hole to vent air as the other is used to fill the coupling).
- 3 - Reinstall both plugs using non-locking thread sealant as needed to prevent leaks. Do not over tighten the tapered fill plugs because they will crack the aluminum housing.
- 4 - The fill marks allow operators to correctly fill the coupling, without using any measuring tools, and they also provide reference points if the quantity of oil needs to be changed to improve the softness of the start or reduce the slip at steady running.
- 5 - For normal operating conditions, use only ISO HM32 hydraulic (or the equivalent SAE 10W non-detergent motor oil). At low ambient temperatures (near 0°C), it is recommended to use ISO FD 10 (or equivalent SAE 5W) oil.
- 6 - For fluid couplings mounted on vertical shafts, use the oil quantities listed in Tab. E below.
- 7 - NOTE : Maximum fill quantities cannot exceed the following fill positions (quantities):
  - A) For the "K" series couplings – "X" (i.e. for a 21K max fill is 19 liters)
  - B) For the "CK" series couplings – "2" (i.e. for a 21CK max fill is 23 liters)
  - C) For the "CCK" series couplings – "3" (i.e. for a 21CCK max fill is 27.3 liters)

## SAFETY DEVICES

### FUSIBLE PLUG

In case of a load lock-up or high slip in the fluid coupling the oil temperature in the coupling will reach very high levels. This heat damages the seals causing them to leak.

To avoid this problem Transfluid uses melt-out or fusible plugs to release the oil when the the temperature reaches certain set points. Once the coupling is empty, it can neither transmit power or create internal heat. The standard fusible plug melts out at 140°C ± 5° (other temperatures available are 120°C and 198°C).

### SWITCHING PIN

For applications where the release of oil through the fusible plug is not acceptable, Transfluid provides a switching pin device. This device has a meltout ring that releases a pin which slides out and trips a relay cam switch. The relay provides a signal that can be used to either stop the power source or send out an alarm. No oil is released from the coupling when this device activates, and the pins are available to trip at the two fusible plug temperatures. Page 25 provides a more detailed description of this device.

### ELECTRONIC OVERLOAD CONTROLLER

This device consists of a proximity sensor, speed controller panel, and (as an option) an LED rpm readout panel. The sensor measures the fluid coupling output speed and when this speed falls below a settable threshold in the control panel, a signal is produced that can be used for an alarm or as a power source shut down. This device does not require any replacement parts when it trips. It only requires that the control panel be reset, and it is ready for reuse. Page 26 provides a more detailed description.


### INFRARED TEMPERATURE CONTROLLER

This device consists of an infrared heat sensor and control panel with temperature readout display. Like the proximity sensor above, no contact with the coupling is required and the controller has two settable thresholds at which an alarm or a shut down signal is produced. Since this device monitors heat it is the most effective safety device for preventing heat damage to a fluid coupling. Also, like the speed controller above, this unit can be reset and reused without replacements parts. Page 27 provides more details.

Size Fillings

Tab. E

| Size | OIL QUANTITY lt |        |        |
|------|-----------------|--------|--------|
|      | FILL X          | FILL 2 | FILL 3 |
| 6    | 0.50            | —      | —      |
| 7    | 0.92            | —      | —      |
| 8    | 1.50            | —      | —      |
| 9    | 1.95            | —      | —      |
| 11   | 2.75            | 3.35   | —      |
| 12   | 4.1             | 4.8    | —      |
| 13   | 5.2             | 5.6    | —      |
| 15   | 7.65            | 8.6    | 9.3    |
| 17   | 11.7            | 13.6   | 16.4   |
| 19   | 14.2            | 16.5   | 18.8   |
| 21   | 19              | 23     | 27.3   |
| 24   | 28.4            | 31.2   | 35.5   |
| 27   | 42              | 50     | 59.5   |
| 29   | 55              | 63     | 70.6   |
| 34   | 82.5            | 92.5   | 96.7   |
| D34  | 162             | —      | —      |

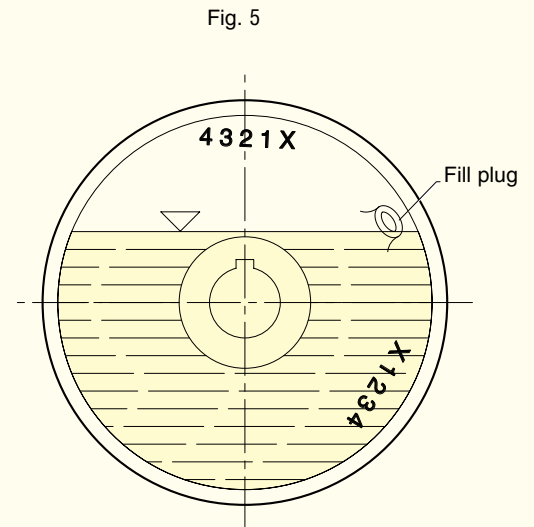

# SAFETY DEVICES OPERATION

## 10.1 SWITCHING PIN DEVICE

This device includes a percussion fusible plug installed on the taper plug pos. 13 (Fig. 6).

The percussion fusible plug is made of a threaded plug and a pin, held by a fusible ring, coming out due to the centrifugal force when the foreseen melting temperature is reached.

Such increase of temperature can be due to overload, machinery blockage or insufficient oil filling. The pin, moving by approx. 16 mm, intercepts the cam of the switch to operate an alarm or motor trip signal.

After a possible intervention and removal of the over-temperature cause, this device can be easily restored with the replacement of the percussion plug or even the fusible ring following the specific instructions included in the instruction manual.


With external wheel as driver, as indicated in Fig. 6, the percussion plug operates in any condition, while in case of driven external wheel it can operate correctly only during an increase of slip due to overload or excessive absorption.

It is possible to install this system on all fluid couplings starting from size 13K even when it has not been included in the initial supply, by asking for a kit including percussion fusible plug, gasket, taper plug, counterweight for balancing, glue and installation instructions.


In order to increase the safety of the fluid coupling a standard fusible plug is always installed with a set temperature greater than that of the percussion fusible plug.

For a correct operation, please refer to the instructions relevant to the standard or reverse installation described at page 28.

Fig. 6

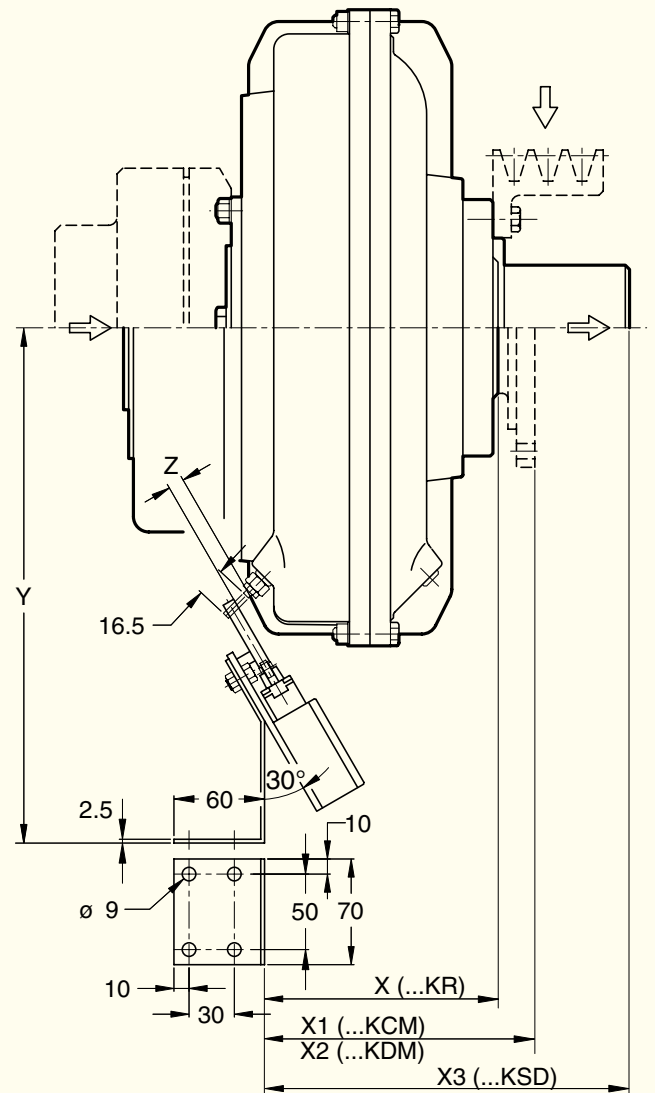

### Switching pin

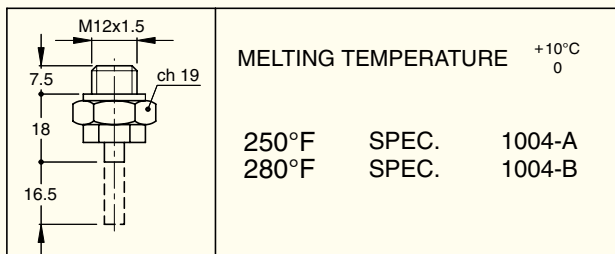

| DIM. | X   | X <sub>1</sub> | X <sub>2</sub> | X <sub>3</sub> | Y     | Z  |
|------|-----|----------------|----------------|----------------|-------|----|
| 7    | 107 | 108            | -              | 143            | 262   | -  |
| 8    | 116 | 117            | -              | 152            | 272   | -  |
| 9    | 138 | 153.5          | 136            | 195            | 287.5 | -  |
| 11   | 145 | 152            | 143            | 201            | 300.5 | -  |
| 12   | 155 | 163.5          | 153            | 245.5          | 323   | 15 |
| 13   | 172 | 175            | 170            | 289            | 335   | 16 |
| 15   | 198 | 200            | 199            | (6) 323        | 358   | 16 |
| 17   | 222 | 200            | 218            | 405            | 382   | 12 |
| 19   | 214 | 190            | 210            | 397            | 400.5 | 9  |
| 21   | 262 | 264            | 260            | (7) 451        | 423   | 8  |
| 24   | 263 | 265            | 261            | (7) 452        | 460   | 4  |
| 27   | 286 | 311            | 277            | -              | 491   | 9  |
| 29   | 299 | 336            | 302            | -              | 524   | 8  |
| 34   | 361 | 393            | 353            | -              | 584   | 4  |

(6) For cylindrical bore: +14 mm

(7) For bore 98.425: +40 mm

REFERENCE DIMENSIONS

DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

## OVERLOAD CONTROLLER

When load torque increases, slip also increases and output speed consequently decreases.

The said speed variation can be measured by means of a sensor sending a pulse train to the speed controller. If the rotating speed goes lower than the set threshold (see diagram) on the controller, a signal is given through the activation of the controller's relays.

The device has got a "TC" timer with a blind time before starting (1 - 120 s) avoiding the alarm intervention during the starting phase, and another "T" timer (1 - 30 s) preventing from undesired relay intervention during sudden changes of torque.

The device also provides a speed proportional analogic output signal (0 - 10 V), to be forwarded to a display or a signal transducer (4 - 20 mA).

Standard supply is 230 V ac, other supplies are available upon request: 115 V ac, 24 V ac or 24 V dc, to be specified with the order.

### CONTROLLER PANEL (Fig. 8)

**(TC)** Blind time for starting

Set screw regulation up to 120 s.

**(DS)** Speed range regulation

Programmable DIP-SWITCH (5 positions), selecting relay status, proximity type, reset system, acceleration or deceleration. Programming speed Dip-Switch with 8 positions allows to choose the most suitable speed range, according to the application being performed.

**(SV)** Speed level (set point)

Set screw regulation with digits from 0 to 10. The value 10 corresponds to full range set with Dip-Switch.

**(R)** Reset

Local manual reset is possible through R button, or remote reset by connecting a N.O. contact at pins 2-13.

**(SS)** Threshold overtaking

**(RED LED)** It lights up every time that the set threshold (set point) is overtaken.

**(A)** Alarm led

**(RED LED)** It lights up when alarm is ON and the inner relay is closed.

**(E)** Enable

**(YELLOW LED)** It lights up when the device is enabled.

**(T)** Delay time

Set screw regulation up to 30 s.

**(ON)** Supply

**(GREEN LED)** It shows that the device is electrically supplied.

FOR FURTHER DETAILS, ASK FOR TF 5800-A.

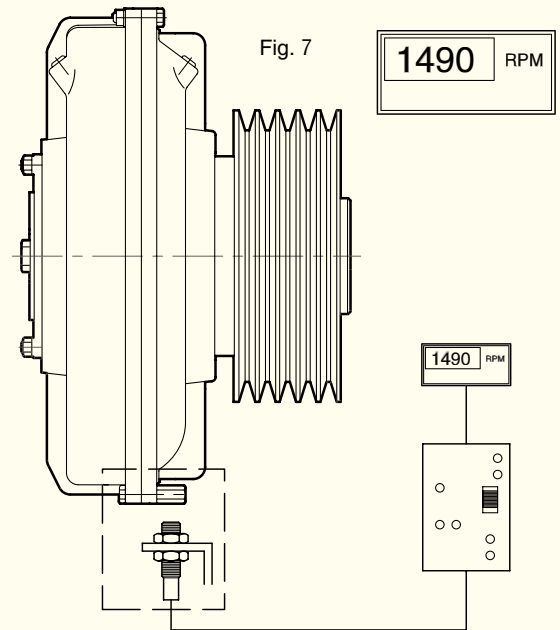


Fig. 7


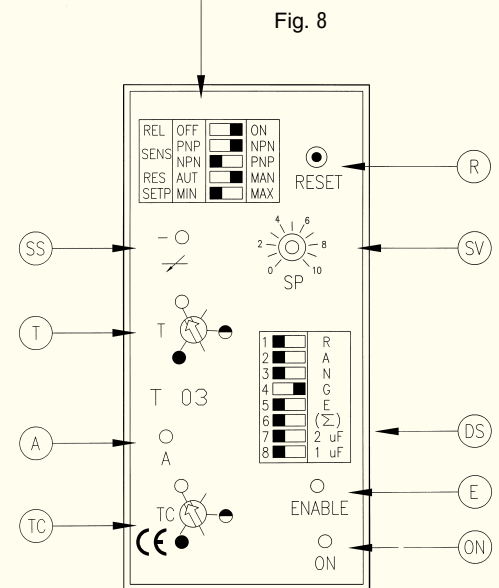


Fig. 8

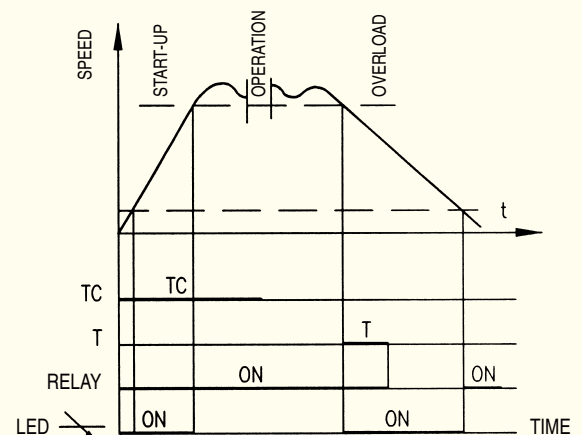

Diagram

# SAFETY DEVICES OPERATION

## INFRARED TEMPERATURE CONTROLLER

This is a non contacting system to check fluid coupling temperature. It is reliable and easily mounted.

It has 2 adjustable thresholds with a logical alarm on the former, and a relay alarm on the latter.

The proximity sensor must be positioned near the fluid coupling outer impeller or cover, according to one of the layouts shown in Fig. 9.



It is advised to place it in A or C positions, as the air flow generated by the fluid coupling during rotation helps to remove possible dirt particles that may lay on the sensor lens.

The distance between the sensor and the fluid coupling must be about 15-20 mm (cooling fins do not disturb the correct operation of the sensor).



To avoid the bright surface of the fluid coupling reflecting light and producing an incorrect temperature reading, it is necessary to paint the surface, which is directly facing the sensor, a flat black color (a stripe of 6-7 cm is sufficient).

The sensor cable has a standard length of 90 cm. In the case where, a longer cable is required, use one that is twisted and shielded as per type "K" thermocouples.

Fig. 9

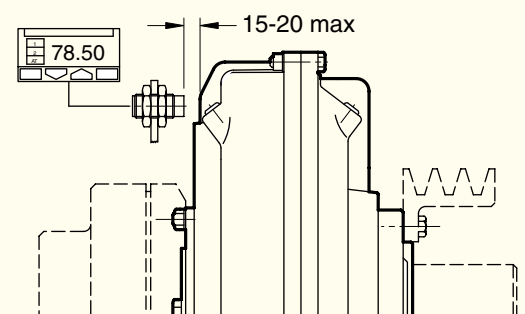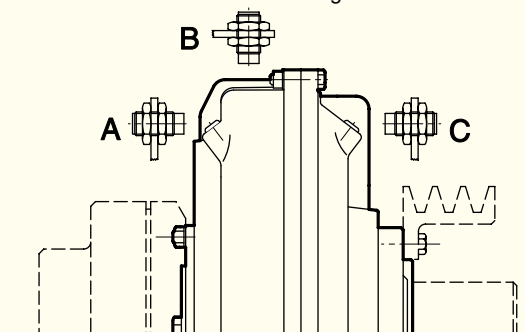

| SENSOR  |                               |
|---|-------------------------------|
| Temperature range                             | 0 ÷ 200 °C                    |
| Ambient temperature                           | -18 ÷ 70 °C                   |
| Accuracy                                      | 0.0001 °C                     |
| Dimensions                                    | 32.5 x 20 mm                  |
| Standard wire length •                        | 0.9 m                         |
| Body  | ABS                           |
| Protection                                    | IP 65                         |
| CONTROLLER                                    |                               |
| Power supply                                  | 85...264 Vac / 48...63 Hz     |
| Relay output OP1                              | NO (2A – 250V)                |
| Logical output OP2<br>(5Vdc, ±10%, 30 mA max) | Not insulated                 |
| AL1 alarm (display)                           | Logic (OP2)                   |
| AL2 alarm (display)                           | Relay (OP1) (NO, 2A / 250Vac) |
| Pins protection                               | IP 20                         |
| Body protection                               | IP 30                         |
| Display protection                            | IP 65                         |
| Dimensions                                    | 1/32 DIN – 48x24x120 mm       |
| Weight  | 100 gr                        |

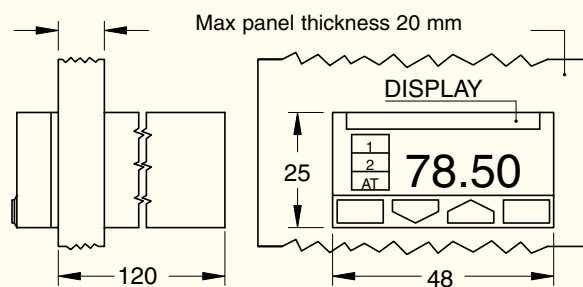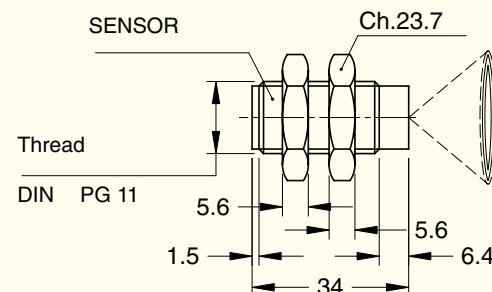

• TO BE MADE LONGER WITH TWISTED AND SHIELDED WIRES FOR TYPE K THERMOCOUPLES (NOT SUPPLIED)



## INSTALLATION

### STANDARD MOUNTING

Driver inner impeller

### REVERSE MOUNTING

Driver outer impeller

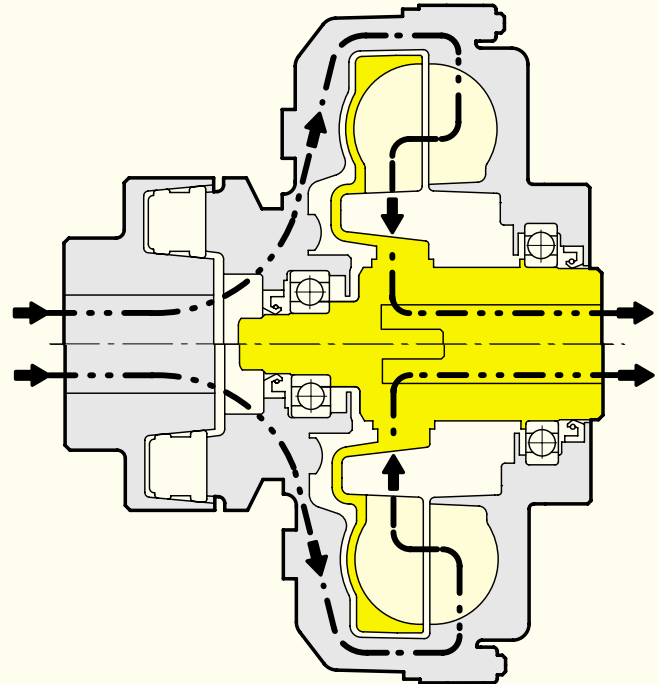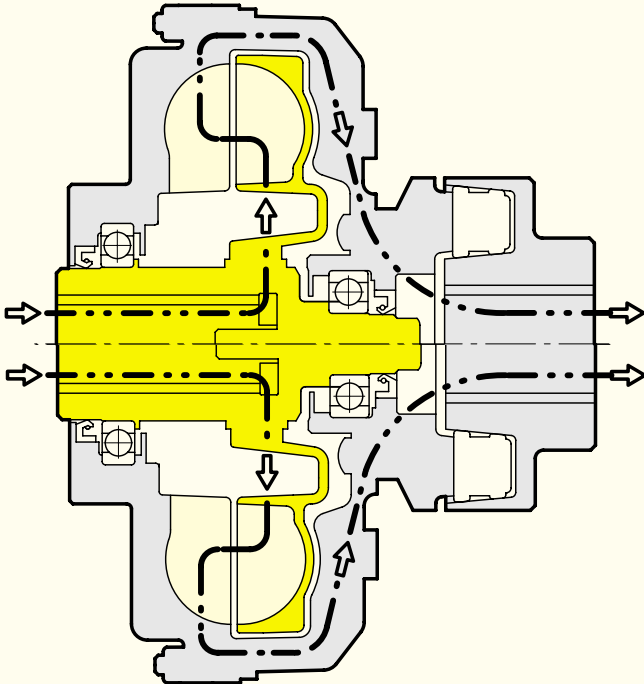

Minimum possible inertia is added to the motor, which allows it to accelerate more quickly.

If a braking system is required, it is convenient and easy to install a brake drum or disc on the flex coupling.

The delayed fill chamber, when present, is fitted on the driven side. The rotating speed of the chamber gradually increases during start-up, thus leading to a longer starting time, given the bleed orifices diameters are not changed.

Flex coupling is protected by the presence of the fluid coupling in front of it, and therefore this configuration is fit for applications with frequent start-ups or reversals.

The outer impeller, being directly connected to the motor, reaches synchronous speed at once. Ventilation is therefore maximum from the beginning.

The outer impeller and cover are connected to the motor, it is possible to manually rotate the coupling to check alignment and oil level, and for refilling.

The delayed fill chamber is fitted on the driver side, and reaches the synchronous speed in a few seconds. Oil is therefore centrifuged into the main circuit gradually and completely.

The switching pin operation is always assured, as the outer impeller, always rotates because it is mounted on the driver shaft.

# APPLICATIONS

## FIELDS OF APPLICATION

### • MISCELLANEOUS

- Centrifugal fans
- Centrifugal and reciprocating compressors
- Belt and bucket conveyors
- Chain conveyors
- Bridge cranes (translation and rotation)
- Rotating jib cranes
- Winders
- Winches
- Ski lifts
- Merry-go-round, thrill rides
- Mine car haulage

### • BUILDING MACHINERY

- Tower cranes (translation and rotation)
- Screw and slat conveyors

### • MACHINES FOR QUARRIES

- Crushers
- Ball, barrel and hammer mills
- Bucket excavators
- Screening drums

### • MACHINES FOR CONCRETE

- Mixers
- Rotating furnaces

### • MACHINES FOR CERAMIC INDUSTRY

- Continuous and non continuous ball mills
- Mixers
- Presses

### • BRICK MACHINES

- Clod crushers
- Crushing mills
- Rolling mills
- Brick-molding machines

### • MACHINES FOR STONE CUTTING AND FINISHING

- Frame cranes
- Stone cutting machines

### • TEXTILE MACHINES

- Barrels for tannery
- Centrifuges
- Carding machines
- Washing machines

### • WOOD WORKING MACHINES

- Debarking drums
- Plywood pressing machines
- Chipping machines

### • PULP AND PAPER MACHINERY

- Paper winding drums
- Pulpers

### • BITUMINOUS ROAD MIX MACHINES

### • MACHINES FOR WASTE DISPOSAL

- Grinders
- Water depurators

### • CHEMICAL, FOOD AND BOTTLING MACHINERY

- Centrifugal agitators
- Centrifugal idroextractors
- Rotating filters
- Soap cutters
- Rubber calendars and mixers
- Pallettizers
- Labeling machines

### • MECHANICAL AND AUTOMOTIVE INDUSTRY


- Balancing machines
- Gate closing control drives

### • METAL WORKING MACHINES

- Machines to twist ropes and wires
- Bar-straightening machines
- Presses
- Forming machines
- Wiredrawing machines


**FLUID COUPLING  
KSL SERIES**

Start up and variable  
speed drive up to 4000 kW




**FLUID COUPLING  
KPT SERIES**

Start up and variable  
speed drive up to 1700 kW



**FLUID COUPLING  
KPTO SERIES**

For internal combustion engines  
P.T.O. for pulley and cardan shaft  
up to 1700 kW

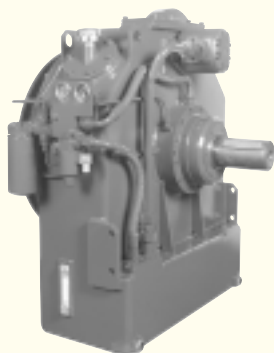

**FLUID COUPLING  
K SERIES**

For diesel engines  
Up to 1300 kW



**OIL ACTUATED  
HFO - HFU SERIES**

For internal combustion engine  
up to 750 kW



**FLUID COUPLING  
KX SERIES**

Constant fill  
Up to 1000 kW



Questo manuale contiene le istruzioni per l'installazione, l'avviamento, l'uso e la manutenzione del giunto idrodinamico tipo KFB. **CONSIGLIAMO CHE I RESPONSABILI DELL'USO E DELLA MANUTENZIONE DEL KFB, VENGANO DOTATI DEL PRESENTE MANUALE. IL NON RISPETTO DELLE REGOLE CITATE IN QUESTO MANUALE, PROVOCA IL DECADERE DELLA GARANZIA.**

Ricordiamo che, per ordinare le parti di ricambio, e' importante specificare, oltre al numero di dettaglio e quantita' richiesta, anche: TIPO - N° di SPECIFICA - N° di SERIE del KFB, che si trovano stampigliati sulla targhetta di identificazione a bordo macchina.

*This manual contains instructions for installation, start up, working, and maintenance of KFB fluid coupling.*

**WE SUGGEST THAT ANY PERSON WHO IS RESPONSIBLE FOR USE AND/OR MAINTENANCE, SHOULD BE PROVIDED WITH THIS MANUAL. THE RESPECT OF RULES, CONTAINED IN THIS MANUAL, IS MANDATORY FOR WARRANTY VALIDITY.**

*We recall that, for spare parts order, it is important to provide, besides detail number and quantity, even:*

*TYPE - SPECIFICATION Nr. - SERIAL Nr. of KFB that are stamped on identification metal plate.*

| DESCRIZIONE  | DESCRIPTION   |
|--|---|
| Il KFB e' un giunto idrodinamico la cui parte esterna, motrice, e' collegata al volano di un motore endotermico mediante un giunto elastico ed il cui albero di uscita e' supportato da un cuscinetto orientabile a rulli, lubrificato ad olio, alloggiati in una campana di supporto flangiata al coprivolano del motore. Un secondo cuscinetto, alloggiato nel volano, sostiene l'albero di uscita dal lato motore. Il KFB e' adatto per applicazioni con puleggia od i linea. | KFB is a fluid coupling having the outer driving impeller connected to the internal combustion engine flywheel through an elastic coupling. The output shaft is supported by a spherical roller bearing, oil lubricated, fitted in a cover flanged to the engine flywheel housing. Another bearing, fitted into the flywheel, supports the output shaft at the engine side. The KFB is suitable for pulley or in line applications. |

**Prima di iniziare il montaggio del KFB sul motore, e' bene verificare che il volano rientri nelle tolleranze SAE. Questo e' importante soprattutto per il buon funzionamento del giunto elastico.(Vedere foglio 2/3 Fig.1)**

**Before KFB be mounted onto the engine, it is recommended to check that flywheel be within SAE tolerances. This is very important for elastic coupling good working.(see sheet 2/3 Fig.1)**

| INSTALLAZIONE (vedere foglio 2/3)  | INSTALLATION (see sheet 2/3)  |
|--|---|
| <ol style="list-style-type: none"> <li>1 Montare l'anello di trascinamento del giunto elastico sul volano del motore.</li> <li>2 Montare il cuscinetto pilota, ingrassato a vita, sull'albero del KFB.</li> <li>3 Montare la flangia SAE 3 sul coprivolano.</li> <li>4 Posizionare il gruppo completo, osservando con cura l'allineamento dell'albero nel cuscinetto pilota e dei blocchetti del giunto elastico con l'anello di trascinamento montato sul volano. La campana esterna deve essere orientata in modo da avere l'apertura per il riempimento dell'olio a circa 60° dalla verticale, in senso orario guardando il volano del motore. Così montato, si avra' l'apertura di drenaggio dell'olio in basso. Infine fissare il gruppo con le apposite viti sulla flangia esterna.</li> <li>5 Riempimento olio giunto (vedere tabella olii consigliati). Togliere il coperchio che protegge il tappo di carico. Ruotare il giunto sino a portare il tappo in corrispondenza del segno di riferimento X sulla verticale (X-1-2-3-4 dipende dall'applicazione). Togliere il tappo e riempire fino allo sbocco dal foro (13KFB X=5,2 lt;), quindi chiudere utilizzando del sigillante sul filetto. La coppia di serraggio e' 30 Nm per tappo 3/8". Rimontare il coperchio di protezione.</li> <li>6 Riempimento grasso (vedere tabella grassi consigliati). Mediante l'apposito ingrassatore,, riempire la camera di lavoro del cuscinetto fino a far fuoriuscire il grasso attorno all'albero</li> <li>7 Dare alcuni colpi, con un martello non metallico, sull'estremita' dell'albero onde eliminare ogni eventuale tensione sui cuscinetti dovuta alla resistenza offerta dal cuscinetto pilota, quando esso viene montato forzato nella sede del volano.</li> <li>8 Al primo avviamento, far girare il gruppo innestato, per almeno 10 minuti, con il motore alla meta' dei giri massimi.</li> </ol> | <ol style="list-style-type: none"> <li>1 Mount elastic coupling driving ring, onto engine flywheel.</li> <li>2 Mount pilot bearing, greased for life, onto KFB shaft.</li> <li>3 Mount SAE 3 flange onto flywheel housing.</li> <li>4 Install complete group paying attention at alignment between shaft and pilot bearing as well as alignment between rubber blocks and driving ring.<br/>External housing must be orientated to get the oil fill opening at about 60° clockwise from vertical line, looking at the flywheel.<br/>In such a way, the oil drain opening will be downwards.<br/>Therefore tighten screws of external flange.<br/>Fluid coupling oil filling (see recommended oil table). Remove cover. Turn fluid coupling until X mark be on vertical line (X-1-2-3-4 depends on application). Remove plug and fill until oil overflows (13KFB fill X=5,2 lt;). Therefore fit the plug using sealent on thread. Tightening torque is 30 Nm for 3/8" plug .Fit again the cover.<br/>Grease filling (see recommended grease table). Through the grease filler, fill grease until it comes out around the shaft.</li> <li>5 Rap the shaft on the end to relieve any preloading that may result due to the resistance of pilot bearing when being pressed into the flywheel.</li> <li>6 At first start up, run the unit engaged and engine at half of max speed for not less than 10 minutes.</li> <li>7</li> <li>8</li> </ol> |



### MANUTENZIONE- MAINTENANCE

|   |   |
|---|---|
| Controllare, ogni 3 mesi, il livello dell'olio nel giunto. Cambiare l'olio ogni 4000 ore di funzionamento oppure una volta all'anno.                                    | Check, every 3 months, the fluid coupling oil level. Change oil every 4000 working hours or once a year, whichever occurs first.                  |
| Ingrassare il cuscinetto dell'albero di uscita ogni settimana.  | Grease output shaft bearing every week.   |
| Controllare, periodicamente, lo stato dei blocchetti in gomma del giunto elastico.  | Check, periodically, elastic coupling rubber blocks condition.  |
| E' consigliabile, ogni 4000 ore di funzionamento, cambiare tutti gli anelli di tenuta rotante e controllare lo stato dei cuscinetti.                                    | It is advisable, every 4000 working hours, to change all rotating seals and to check bearings condition.  |
| Controllare, periodicamente, che la taratura del termostato, se installato, sia uguale al valore originariamente impostato (vedere certificato di collaudo e TF5941-O). | Check, periodically, that temperature switch whether installed, set value be the same as originally adjusted (see test certificate and TF5941-O). |
| Pulire periodicamente la sonda del termostato, se installato.   | Clean periodically the temperature switch bulb, whether installed.  |

### TABELLA INCONVENIENTI

| SINTOMO                  | CAUSA  | RIMEDIO  |
|--------------------------|--|--|
| Scarse prestazioni       | Livello olio   | Controllare il livello (olio freddo) ed aggiungere se necessario<br>Controllare la macchina condotta<br>Controllare i giri del motore. |
|                          | Tipo olio  | Utilizzare olio indicato in tabella  |
| Surriscaldamento         | Scorrimento eccessivo  | Controllare il livello olio<br>Verificare l'installazione<br>Controllare i giri del motore   |
|                          | Scarsa ventilazione  | Pulire le aperture per la ventilazione.  |
|                          | Cuscinetto non lubrificato   | Verificare il livello olio ed eventualmente aggiungere   |
|                          | Cuscinetto in uscita danneggiato   | Sostituire   |
|                          | Carico radiale eccessivo   | Ridurre la tensione delle cinghie.   |
| Perdita olio lato motore | Tappo conico   | Rimontare con sigillante per filetti   |
|                          | Anello OR  | Sostituire   |
|                          | Tenuta rotante   | Sostituire. Controllare l'usura sull'albero.   |
| Perdita olio lato uscita | Tappo conico   | Rimontare con sigillante per filetti   |
|                          | Tappo fusibile se installato   | Sostituire   |
|                          | Anelli OR  | Sostituire   |
|                          | Tenuta Rotante.  | Sostituire. Controllare l'usura sull'albero.   |
| Rumore.                  | Rottura cuscinetto   | Sostituire   |
|                          | Olio con troppa schiuma  | Controllare il livello ed il tipo di olio  |
|                          | Usura eccessiva giunto elastico (vibrazioni torsionali?, temperatura eccessiva ?, disallineamento?, olio.) | Smontare e sostituire i blocchetti od il giunto elastico completo.   |
|                          | Usura della dentatura tra albero uscita mozzo, girante interna.  | Smontare e sostituire le parti usurate.  |
| Intervento termostato    | Alta temperatura olio  | Vedere "surriscaldamento"  |
|                          | Errata taratura termostato   | Vedere certificato di collaudo e TF 5941-O   |

### TROUBLE SHOOTING

| SYMPTOM                          | CAUSE   | REMEDY   |
|----------------------------------|---|--|
| Poor performances                | Oil level.  | Check level (cold oil) and add as necessary.<br>Check driven machine.<br>Check engine rpm. |
|                                  | Oil type  | Use recommended oil (see table).   |
| Overheating.                     | High slip   | Check oil level.<br>Check installation.<br>Check engine rpm.                               |
|                                  | Low ventilation.  | Clean ventilation openings.  |
|                                  | No lubricated bearing.  | Check oil level .<br>Add oil if required .   |
|                                  | Damaged output bearing.   | Replace.   |
|                                  | Too high radial load.   | Decrease belt tension.   |
| Oil leakage at engine side.      | Taper plug  | Remount using thread sealant.  |
|                                  | O-ring.   | Replace.   |
|                                  | Rotating seal.  | Replace. Check shaft wear.   |
|                                  | Filling plug.   | Remount using thread sealant.  |
| Oil leakage at output side.      | Fusible plug, whether installed.  | Replace.   |
|                                  | O-ring.   | Replace.   |
|                                  | Rotating seal.  | Replace. Check shaft wear.   |
|                                  | Bearing failure   | Replace.   |
| Noise                            | Too much oil foam.  | Check oil level and type.  |
|                                  | Elastic coupling wear. (Torsional vibration ? high temperature ? misalignment ? oil ?). | Dismantle and replace rubber blocks or complete elastic coupling.                          |
|                                  | Spline wear between output shafthub, inner impeller                                     | Dismantle and replace worn components.   |
|                                  | High oil temperature.   | See "overheating".   |
| Temperature switch intervention. | Wrong switch setting.   | See test certificate and TF 5941-O.  |

## For Electric Motors and Internal Combustion Engines:

ENERGY EFFICIENT

REDUCE POWER CONSUMPTION

PROTECT EQUIPMENT AND PROVIDE SMOOTH  
ACCELERATION

**IMPORTANT NOTICE, WARRANTY:** Seller warrants its product sold herein against defects in material and workmanship for a period of 12 months from the date of invoice; provided, that the installation, operation and maintenance of said product conforms with any and all manufacturer's specifications and all applicable government health and safety regulations. Seller's obligation under this warranty shall be limited to replacing and or repairing, at its facility or facility so designated, any part thereof which has been demonstrated to be defective. Seller shall not be responsible for any and all costs related to the disassembly, transportation and shipment to Seller's repair facility and reinstallation of any defective part or parts repaired according to the terms of this warranty. The Seller's sole responsibility shall be to repair and replace defective parts according to the terms of this limited warranty; Sellers shall not be responsible for any and all consequential damages including, but not limited to, personal injury, property damage and loss of income and profits. The drawings, charts, diagrams and information contained in this sales package are for the sole purpose of identifying the product and shall not be deemed to create an expressed warranty that the goods shall conform to such description. No affirmation, promise or description shall be deemed part of the basis of the bargain.

**This warranty is expressly in lieu of all other warranties expressed or implied including the warranty of merchantability and fitness for a particular purpose or use and all other obligations or liabilities on the Seller's part.**

Seller neither assumes, nor autohORIZES any other persons to assume for it, any other liability in connection with the sale of this product.

LOCAL DISTRIBUTOR

 **KRAFT POWER CORP.**

1000B Northbrook Parkway Suwanee GA 30024 Tel. 770/963-6288  
Toll Free 800/394-0078 Fax: 770/963-9678 E-mail [transfluid@kraftpower.com](mailto:transfluid@kraftpower.com)